


A08.ASA

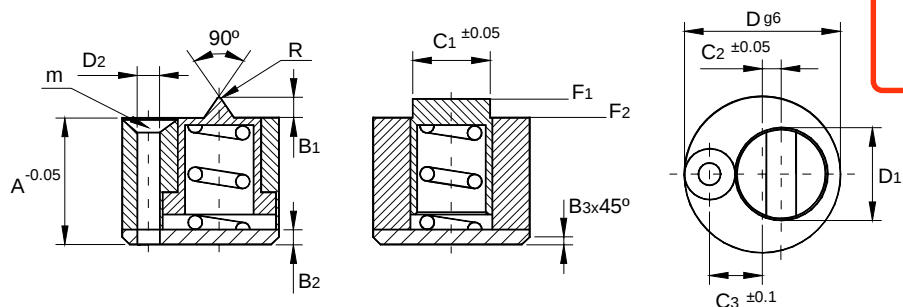


Máx. 100°C

Material: 1.2842, 58-60 HRc

m	D2	F2(N)	F1(N)	R	B3	B2	B1	C3	C2	C1	D1	A	D	CÓDIGO
M2X16	2.2	34	28	0.35	0.35	1.6	1.0	4.3	1.4	6.6	7	10	13	A08.ASA1310
M3X20	3.2	42	38	0.50	0.50	2.0	1.8	6.0	2.0	9.6	10	14	18	A08.ASA1814
M4X25	4.3	92	38	0.75	0.50	3.0	2.8	9.0	3.0	14.4	15	21	27	A08.ASA2721

Obs: Para pedido defina CÓDIGO

Medidas em milímetros

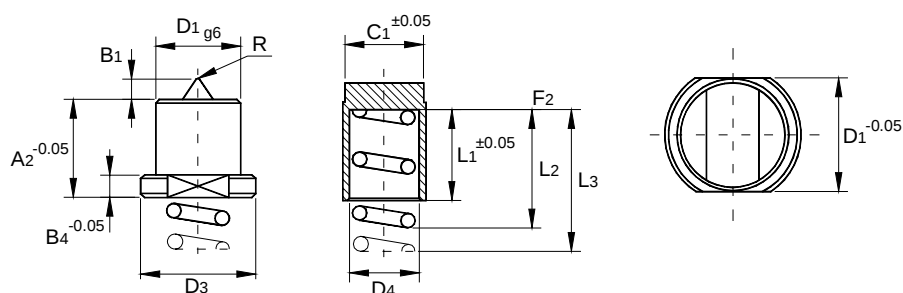

Máx. 100°C

Material: 1.2842, 58-60 HRc

F2(N)	R	L3	L2	L1	B4	B1	C1	D4	D3	A2	D1	CÓDIGO
34	0.35	12	7.50	6.3	1.4	1.0	6.6	5.3	8.4	7	7	A08.ASA07
42	0.50	16	10.0	9.0	2.0	1.8	9.6	8.3	12.0	10	10	A08.ASA10
92	0.75	18	16.0	13.5	3.0	2.8	14.4	12.4	18.0	15	15	A08.ASA15

Obs: Para pedido defina CÓDIGO

Medidas em milímetros

Aplicação:

