


B02.

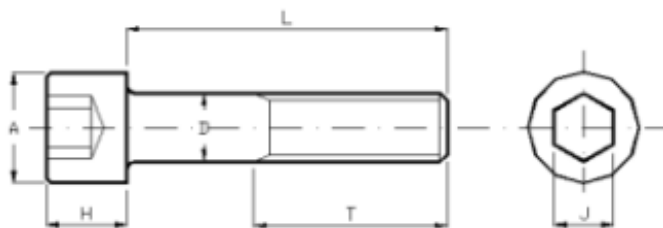

Carga de ruptura > 170.000 psi (>37 HRC)

UNC - Série 1936 - BS 2470 / 1973

L	DIÂMETRO										
	Nº5	Nº10	1/4	5/16	3/8	7/16	1/2	5/8	3/4	7/8	1
							BSW	UNC			
1/4											
3/8											
1/2											
5/8											
3/4											
7/8											
1											
1 1/4											
1 1/2											
1 3/4											
2											
2 1/4											
2 1/2											
2 3/4											
3											
3 1/4											
3 1/2											
4											
4 1/2											
5											
5 1/2											
6											
6 1/2											
7											
8											
9											
Q. caixa	200		100		50		25		10		

A Máx.	7/32	5/16	3/8	7/16	9/16	5/8	3/4	7/8	1	1 1/8	1 5/16
H Máx.	1/8	3/16	1/4	5/16	3/8	7/16	1/2	5/8	3/4	7/8	1
T Mín.	3/4	7/8	1	1 1/8	1 1/4	1 3/8	1 1/2	1 3/4	2	2 1/4	2 1/2
Passo	40	24	20	18	16	14	12	13	11	10	9
J	3/32	5/32	3/16	7/32	5/16	5/16	3/8	1/2	9/16	9/16	5/8

Obs: Para pedido defina B02. DIÂMETRO x L.

Medidas em polegadas

À excepção do diâmetro de 1/2", todas as medidas são equivalentes à norma BS 2470 - BSW.

Os diâmetros 5-40 e 10-24 UNC, série 1936 são equivalentes aos diâmetros 1/8 BSW e 3/16 BSW, respectivamente.

STOCK REROM Sob consulta