


## ALPA DIAL GAUGES FOR INTERNAL MEASUREMENTS



ITEM: BB367

0.01mm resolution - arms are specifically engineered to perform hard-to-access locations measurements.

| Tech. Code |  | Measuring range<br>mm | L<br>mm | B<br>mm | A<br>mm |
|------------|--|-----------------------|---------|---------|---------|
| D21100515  |  | 5 ÷ 15                | 20      | 1.0     | 1.5     |
| D21101020  |  | 10 ÷ 20               | 25      | 1.5     | 3.0     |
| D21101030  |  | 10 ÷ 30               | 55      | 2.0     | 3.5     |
| D21102030  |  | 20 ÷ 30               | 30      |         | 2.5     |
| D21103040  |  | 30 ÷ 40               |         |         |         |
| D21104050  |  | 40 ÷ 50               |         |         |         |
| D21104060  |  | 40 ÷ 60               | 80      | 3.0     | 8.5     |

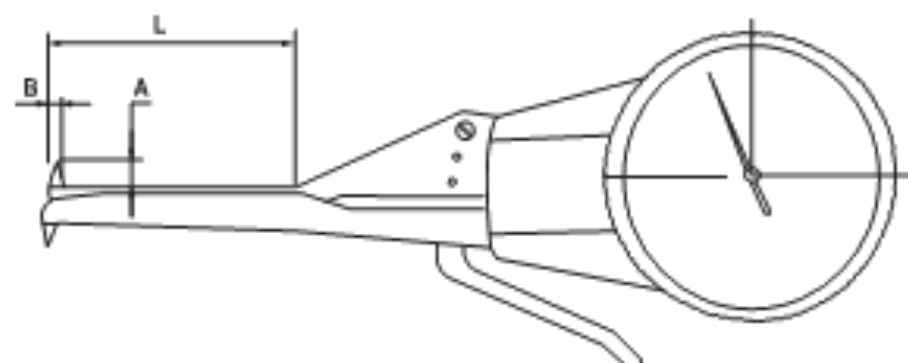


## ALPA DIAL GAUGES FOR EXTERNAL MEASUREMENTS



ITEM: BB377

0.01 mm resolution - Ensuring measuring pressure all along the entire measuring range.

| Tech. Code |  | Measuring range<br>mm | A<br>mm | B<br>mm | L<br>mm |
|------------|--|-----------------------|---------|---------|---------|
| D21200020  |  | 0 ÷ 20                | 25      | 6.5     | 80      |
| D21202040  |  | 20 ÷ 40               |         |         |         |
| D21204060  |  | 40 ÷ 60               |         |         |         |

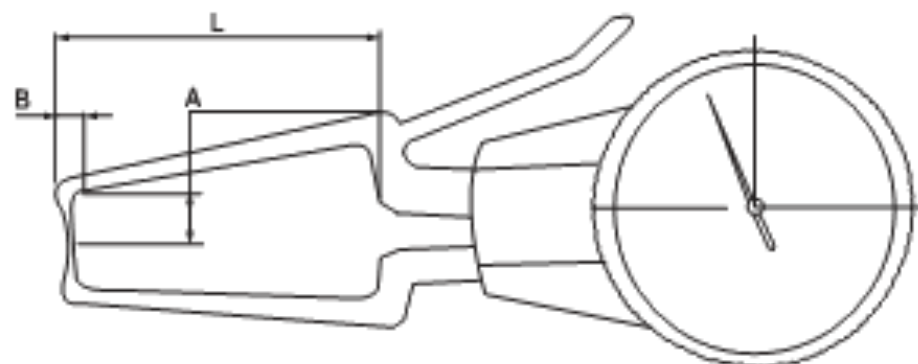

## TECLOCK® BORE GAUGES RANGE 18 - 150 MM 0.001 RESOLUTION



ITEM: DA042

Maximum accuracy and reliability for high accuracy tests (Japanese class A), Traditional bore gauge measuring system, Low dilatation frame, Non-conducting material handle. Carbide moving contact, interchangeable anvils with hardened stainless steel sphere, ø 8 mm dial gauge clamping shank. Accuracy 2 µm, repeatability 2 µm.

| Tech. Code |  | Measuring range<br>mm | Measuring depth<br>mm | N° contacts |
|------------|--|-----------------------|-----------------------|-------------|
| D22221835  |  | 18 ÷ 35               | 150                   | 9           |
| D22223560  |  | 35 ÷ 60               |                       | 6           |
| D222250150 |  | 50 ÷ 150              |                       | 11          |

NOTE: Dial gauge not included