


KERFOLG HYDRAULIC CHUCKS MAS 403 BT AD+B

ITEM: C1031

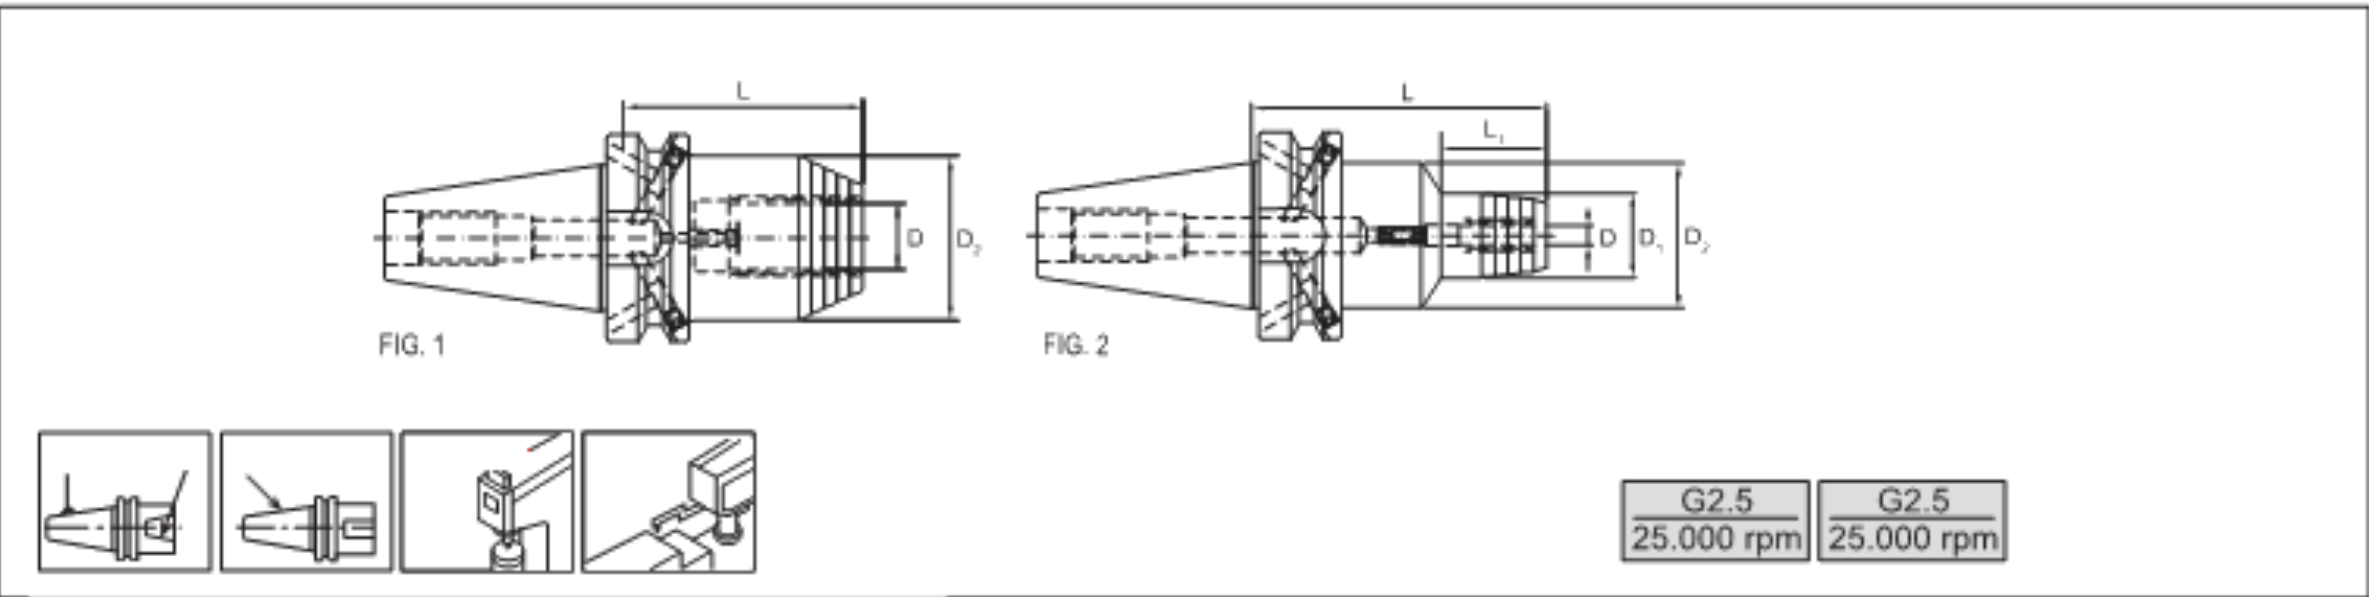

Tech. Code	BT	D mm	L mm	D1 mm	D2 mm	L1 mm	Figure
C1031412090	40	12	90	32	49.5	40	2
C1031416090		16		38		45	
C1031420072*		20	72.5	-		-	1
C1031420090			90	42		47	2
C1031520090	50	20	90	42	49.5	35	2
C1031532090*		32		-	72	-	1

* Short heavy duty design.


For tools with cylindrical shank tolerance h6. Maximum coolant pressure 80 bar. Always respect minimum clamping depth.

- PULL STUDS page C.76

- REDUCTION H.C. page C.72

KERFOLG HYDRAULIC CHUCKS STRONG LOCKING MAS 403 BT AD+B

ITEM: C1032

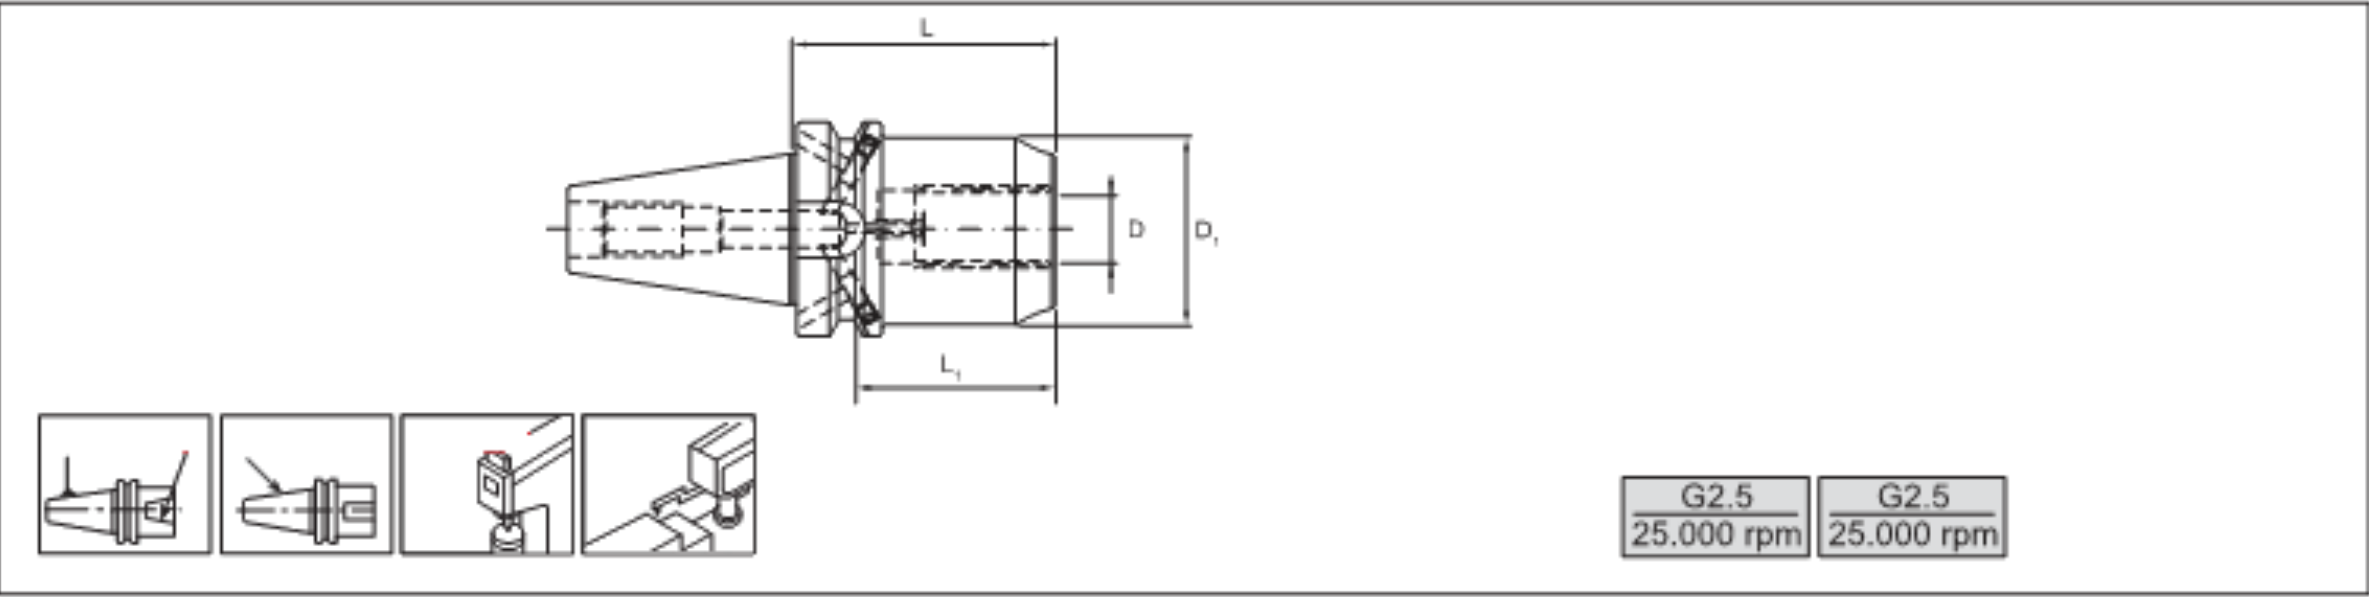

Tech. Code	BT	D mm	L mm	L1 mm	D1 mm	G
C1032420072	40	20	72,5	51	49	M16 x 1 x 13,5
C1032532090	50	32	90	61	72	M16 x 1 x 13,5

Structural characteristics:

- Extremely high clamping force and radial stiffness
- Anti-vibration effect
- High transferability of twisting
- Used on all types of attachments
- Suitable for roughing and milling operations
- High flexibility with the use of reducing sleeves

- PULL STUDS page C.76

- REDUCTION H.C. page C.72

For shank tools in tolerance H6.
Maximum refrigerant pressure 80 bar.
Always respect the minimum clamping depth.