


KERFOLG RIGHT-HAND FIXED DIE - TIN - M



ITEM: A2914

ISO - DIN 13 coarse and fine pitch metric thread

Tolerance 6g
Execution Spiral lapped point.
 Backed-off lapped threads.
Surface finish TiN
Application General application

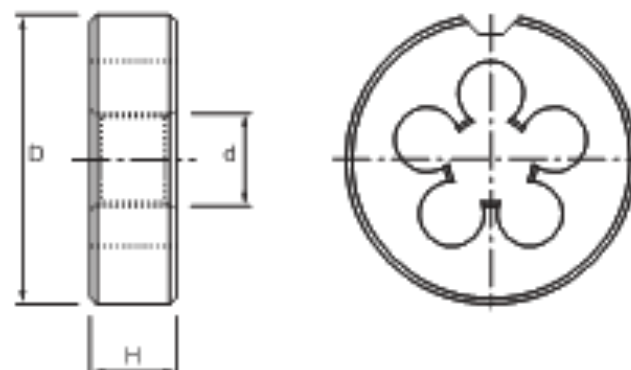

< 500	< 850	< 1200	< 600	< 850	Duplex	< 240	< 300	< 10% Si	> 10% Si	Brass Copper	Bronze	Ti6Al4V	HTA	< 45	< 60
●	○		○			○	○	○	○	○	○				

DIE DIN 22568

A2914	Tech. Code	d x p mm	D mm	H mm
	A2914M3	M 3 x 0,5	20	5
	A2914M4	M 4 x 0,7		
	A2914M5	M 5 x 0,8		7
	A2914M6	M 6 x 1,0		
	A2914M8	M 8 x 1,25	25	9
	A2914M10	M 10 x 1,5	30	11

A2914	Tech. Code	d x p mm	D mm	H mm
	A2914M12	M 12 x 1,75	38	14
	A2914M14	M 14 x 2,0	45	
	A2914M16	M 16 x 2,0		
	A2914M18	M 18 x 2,5		18
	A2914M20	M 20 x 2,5		


KERFOLG RIGHT-HAND FIXED DIE - TIN - MF



ITEM: A2913

ISO - DIN 13 coarse and fine pitch metric thread

Tolerance 6g
Execution Spiral lapped point.
 Backed-off lapped threads.
Surface finish TiN
Application General application

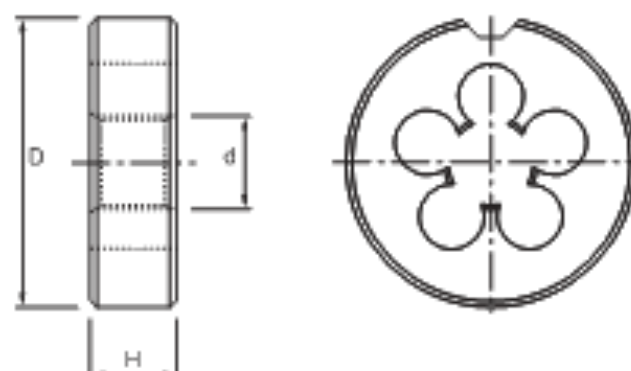

< 500	< 850	< 1200	< 600	< 850	Duplex	< 240	< 300	< 10% Si	> 10% Si	Brass Copper	Bronze	Ti6Al4V	HTA	< 45	< 60
●	○		○					○							

DIE DIN 22568

A2913	Tech. Code	d x p mm	D mm	H mm
	A2913MF81	MF 8 x 1,0	25	9
	A2913MF101	MF 10 x 1,0	30	11
	A2913MF10125	MF 10 x 1,25		
	A2913MF12125	MF 12 x 1,25	38	14
	A2913MF1215	MF 12 x 1,5		

A2913	Tech. Code	d x p mm	D mm	H mm
	A2913MF1415	MF 14 x 1,5	38	14
	A2913MF1615	MF 16 x 1,5	45	
	A2913MF1815	MF 18 x 1,5		18
	A2913MF2015	MF 20 x 1,5		