


KERFOLG® RIGHT-HAND FIXED DIE - MF



ITEM: A2911

ISO - DIN 13 coarse and fine pitch metric thread

Tolerance Execution 6g
Spiral lapped point
Backed-off lapped threads
Surface finish Bright
Application General application

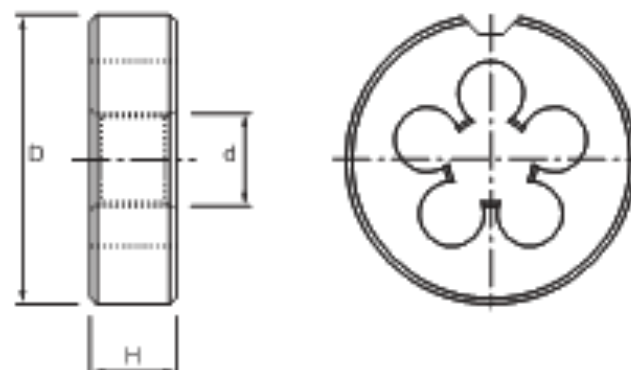

< 500	< 850	< 1200	< 600	< 850	Duplex	< 240	< 300	< 10% Si	> 10% Si	Brass Copper	Bronze	Ti6Al4V	HTA	< 45	< 60
●	○		○					○							

DIE DIN 22568

A2911	Tech. Code	d x p mm	D mm	H mm	A2911	Tech. Code	d x p mm	D mm	H mm
	A2911MF30,35	MF 3 x 0.35	20	5		A2911MF181	MF 18 x 1	45	14
	A2911MF40,35	MF 4 x 0.35				A2911MF181,5	MF 18 x 1.5		
	A2911MF40,5	MF 4 x 0.5				A2911MF182	MF 18 x 2		
	A2911MF50,5	MF 5 x 0.5				A2911MF201	MF 20 x 1		
	A2911MF60,5	MF 6 x 0.5				A2911MF201,5	MF 20 x 1.5		
	A2911MF60,75	MF 6 x 0.75	25	9		A2911MF202	MF 20 x 2	55	16
	A2911MF70,75	MF 7 x 0.75				A2911MF221	MF 22 x 1		
	A2911MF80,5	MF 8 x 0.5				A2911MF221,5	MF 22 x 1.5		
	A2911MF80,75	MF 8 x 0.75				A2911MF222	MF 22 x 2		
	A2911MF81	MF 8 x 1				A2911MF241	MF 24 x 1		
	A2911MF90,75	MF 9 x 0.75	30	11		A2911MF241,5	MF 24 x 1.5	65	18
	A2911MF91	MF 9 x 1				A2911MF242	MF 24 x 2		
	A2911MF100,5	MF 10 x 0.5				A2911MF251,5	MF 25 x 1.5		
	A2911MF100,75	MF 10 x 0.75				A2911MF261	MF 26 x 1		
	A2911MF101	MF 10 x 1				A2911MF261,5	MF 26 x 1.5		
	A2911MF101,25	MF 10 x 1.25	38	10		A2911MF271	MF 27 x 1	75	20
	A2911MF111	MF 11 x 1				A2911MF271,5	MF 27 x 1.5		
	A2911MF120,75	MF 12 x 0.75				A2911MF272	MF 27 x 2		
	A2911MF121	MF 12 x 1				A2911MF281,5	MF 28 x 1.5		
	A2911MF121,25	MF 12 x 1.25				A2911MF301	MF 30 x 1		
	A2911MF121,5	MF 12 x 1.5	45	14		A2911MF301,5	MF 30 x 1.5	75	20
	A2911MF131	MF 13 x 1				A2911MF302	MF 30 x 2		
	A2911MF141	MF 14 x 1				A2911MF331,5	MF 33 x 1.5		
	A2911MF141,25	MF 14 x 1.25				A2911MF332	MF 33 x 2		
	A2911MF141,5	MF 14 x 1.5				A2911MF351,5	MF 35 x 1.5		
	A2911MF151	MF 15 x 1	45	14		A2911MF361,5	MF 36 x 1.5	75	20
	A2911MF161	MF 16 x 1				A2911MF362	MF 36 x 2		
	A2911MF161,25	MF 16 x 1.25				A2911MF381,5	MF 38 x 1.5		
	A2911MF161,5	MF 16 x 1.5				A2911MF401,5	MF 40 x 1.5		
	A2911MF171	MF 17 x 1							


KERFOLG® LEFT-HAND FIXED DIE - M



ITEM: A2915

ISO - DIN 13 coarse and fine pitch thread

Tolerance Execution 6g
Spiral lapped point
Backed-off lapped threads
Surface finish Bright
Application General application

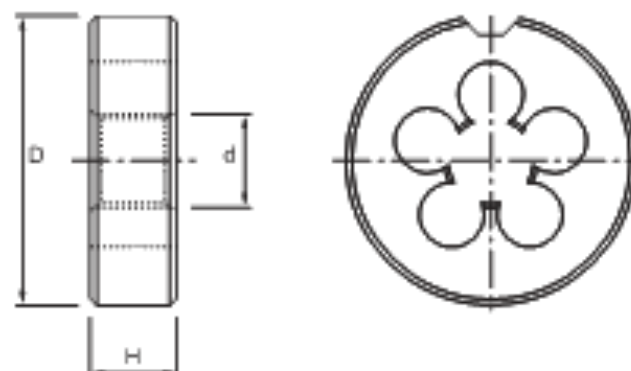

< 500	< 850	< 1200	< 600	< 850	Duplex	< 240	< 300	< 10% Si	> 10% Si	Brass Copper	Bronze	Ti6Al4V	HTA	< 45	< 60
●	○		○					○							

DIE DIN 22568

A2915	Tech. Code	d x p mm	D mm	H mm	A2915	Tech. Code	d x p mm	D mm	H mm
	A2915M2	M2 x 0.4	20	5		A2915M14	M14 x 2	45	14
	A2915M3	M3 x 0.5				A2915M16	M16 x 2		
	A2915M4	M4 x 0.7				A2915M18	M18 x 2,5		
	A2915M5	M5 x 0.8				A2915M20	M20 x 2,5		
	A2915M6	M6 x 1				A2915M22	M22 x 2,5		
	A2915M8	M8 x 1,25	25	9		A2915M24	M24 x 3	55	22
	A2915M10	M10 x 1,5	30	11		A2915M27	M27 x 3		
	A2915M12	M12 x 1,75	38	14		A2915M30	M30 x 3,5	65	25