


KERFOLG RIGHT-HAND FIXED DIE - BSW



ITEM: A2930
BSW thread

Tolerance MC
Execution Spiral lapped point.
Backed-off lapped threads
Surface finish Bright
Application General application

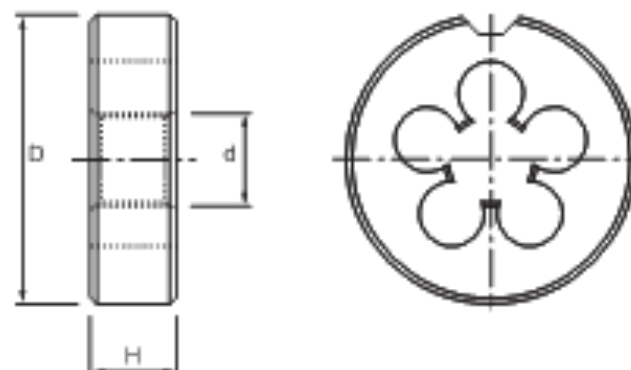

< 500	< 850	< 1200	< 600	< 850	Duplex	< 240	< 300	< 10% Si	> 10% Si	Brass Copper	Bronze	Ti6Al4V	HTA	< 45	< 60
●	○		○			○	○	○	○	○	○				

DIE DIN 22568


A2930	Tech. Code	d x TPI	D mm	H mm	A2930	Tech. Code	d x TPI	D mm	H mm
	A2930BSW3/32	3/32" x 48	20	5		A2930BSW7/16	7/16" x 14	30	11
	A2930BSW1/8	1/8" x 40				A2930BSW1/2	1/2" x 12	38	14
	A2930BSW3/16	3/16" x 24				A2930BSW9/16	9/16" x 12	45	18
	A2930BSW7/32	7/32" x 24		7		A2930BSW5/8	5/8" x 11		
	A2930BSW1/4	1/4" x 20	25	9		A2930BSW3/4	3/4" x 10	55	22
	A2930BSW5/16	5/16" x 18				A2930BSW7/8	7/8" x 9		
	A2930BSW3/8	3/8" x 16	30	11					

KERFOLG RIGHT-HAND FIXED DIE - PG



ITEM: A2935
PG thread DIN 40430

Execution Spiral lapped point.
Backed-off lapped threads
Surface finish Bright
Application General application

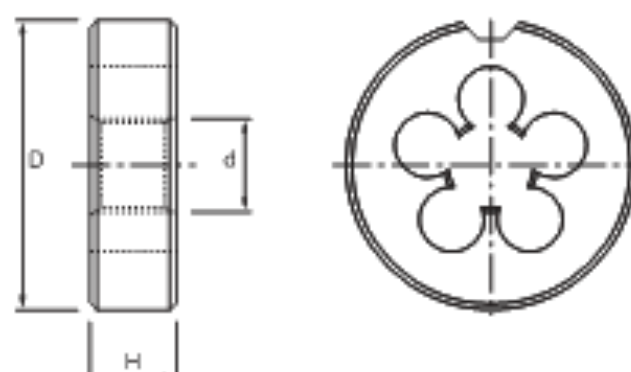

< 500	< 850	< 1200	< 600	< 850	Duplex	< 240	< 300	< 10% Si	> 10% Si	Brass Copper	Bronze	Ti6Al4V	HTA	< 45	< 60
●	○		○			○	○	○	○	○	○				

DIE DIN 40434 B


A2935	Tech. Code	N° x TPI	D mm	H mm	A2935	Tech. Code	N° x TPI	D mm	H mm
	A2935PG7	PG 7 x 20	38	14		A2935PG13,5	PG 13.5 x 18	45	14
	A2935PG9	PG 9 x 18				A2935PG16	PG 16 x 18	55	16
	A2935PG11	PG 11 x 18	45			A2935PG21	PG 21 x 16	65	18

KERFOLG RIGHT-HAND FIXED DIE - BSPT



ITEM: A2940
BSPT thread

Execution Spiral lapped point.
Backed-off lapped threads
Surface finish Bright
Application General application

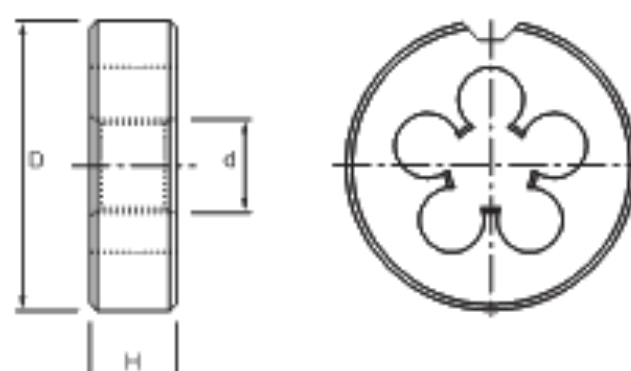

< 500	< 850	< 1200	< 600	< 850	Duplex	< 240	< 300	< 10% Si	> 10% Si	Brass Copper	Bronze	Ti6Al4V	HTA	< 45	< 60
●	○		○			○	○	○	○	○	○				

DIE DIN 24230

A2940	Tech. Code	d x TPI	D mm	H mm	A2940	Tech. Code	d x TPI	D mm	H mm
	A2940BSPT1/8	1/8" x 28	38	11.5		A2940BSPT1/2	1/2" x 14	45	19
	A2940BSPT1/4	1/4" x 19		13		A2940BSPT3/4	3/4" x 14	65	22
	A2940BSPT3/8	3/8" x 19	45	15		A2940BSPT1	1" x 1		20.5