

SLITTING SAW BLADES HSS DIN 1837-A FINE TOOTHING




ITEM: A5460

HSS slitting saws in both high speed and super high speed steels suitable for cutting-off, milling, and grooving steels and alloys on manual, semi-automatic and fully automatic machines.

The saw blade range is Ø 20 mm - Ø 250 mm with thicknesses ranging 0,3 mm - 6 mm in variable increments. On request up to Ø 315.

All standard saws are available in HP-GRIND execution but are readily available in VAPO or P.V.D. (Physical Vapour Deposition) coated execution.

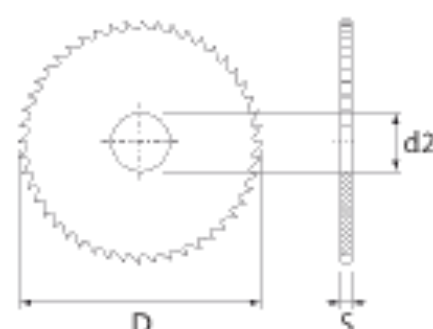

A5460	Tech. Code	D mm	S mm	d2 mm	Z
	A54600200,8	20	0.8	5	48
	A54600201		1		40
	A54600202		2		32
	A54600202,5		2.5		
	A54600250,5	25	0.5	8	64
	A54600251		1		48
	A54600251,6		1.6		40
	A54600252		2		32
	A54600253	32	3	10	64
	A54600255		5		48
	A54600320,6		0.6		
	A54600320,8		0.8		
	A54600321		1		
	A54600321,2		1.2		
	A54600322	40	2	13	128
	A54600400,3		0.3		100
	A54600400,4		0.4		80
	A54600400,5		0.5		64
	A54600400,7	50	0.7	16	100
	A54600400,8		0.8		80
	A54600401		1		64
	A54600401,2		1.2		48
	A54600401,5	63	1.5	20	128
	A54600402		2		100
	A54600402,5		2.5		80
	A54600500,3		0.3		64
	A54600500,4	80	0.4	25	128
	A54600500,5		0.5		100
	A54600500,6		0.6		80
	A54600500,7		0.7		64
	A54600500,8	100	0.8	32	128
	A54600501		1		100
	A54600501,6		1.6		80
	A54600502		2		64
	A54600502,5	125	2.5	40	128
	A54600503		3		100
	A54600630,3		0.3		80
	A54600630,4		0.4		64
	A54600630,5	160	0.5	50	128
	A54600630,6		0.6		100
	A54600630,8		0.8		80
	A54600631		1		64
	A54600631,2	200	1.2	63	128
	A54600631,5		1.5		100
	A54600631,6		1.6		80
	A54600632		2		64
	A54600632,5	250	2.5	80	128
	A54600633		3		100

A5460	Tech. Code	D mm	S mm	d2 mm	Z
	A54600800,3	80	0.3	22	160
	A54600800,4		0.4		128
	A54600800,5		0.5		100
	A54600800,6		0.6		80
	A54600800,8	100	0.8	28	160
	A54600801		1		128
	A54600801,2		1.2		100
	A54600801,5		1.5		80
	A54600801,6	125	1.6	36	160
	A54600802		2		128
	A54600802,5		2.5		100
	A54600803		3		80
	A54600804	160	4	45	128
	A54600805		5		100
	A54600806		6		80
	A54601000,5		0.5	56	160
	A54601000,8	200	0.8		128
	A54601001		1		100
	A54601001,2		1.2		80
	A54601001,5	250	1.5	71	160
	A54601001,6		1.6		128
	A54601002		2		100
	A54601002,5		2.5		80
	A54601003	315	3	80	160
	A54601004		4		128
	A54601005		5		100
	A54601250,8		0.8	95	160
	A54601251	400	1		128
	A54601251,2		1.2		100
	A54601251,5		1.5		80
	A54601251,6	500	1.6	112	160
	A54601252		2		128
	A54601252,5		2.5		100
	A54601253		3		80
	A54601254	630	4	125	160
	A54601601,2		1.2		128
	A54601601,6		1.6		100
	A54601602		2		80
	A54601602,5	800	2.5	160	160
	A54601603		3		128
	A54601604		4		100
	A54601605		5		80
	A54602001	1000	1	200	160
	A54602001,2		1.2		128
	A54602002		2		100
	A54602002,5		2.5		80
	A54602504	1250	4	250	160