

SLITTING SAW BLADES HSS 1838-B - COARSE TOOTHING




ITEM: A5465

HSS slitting saws in both high speed and super high speed steels suitable for cutting-off, milling, and grooving steels and alloys on manual, semi-automatic and fully automatic machines.

The saw blade range is Ø 50 mm - Ø 125 mm with thicknesses ranging 0,5 mm - 6 mm in variable increments.

On request up to Ø 315.

All standard saws are available in HP-GRIND execution but are readily available in VAPO or P.V.D. (Physical Vapour Deposition) coated execution.

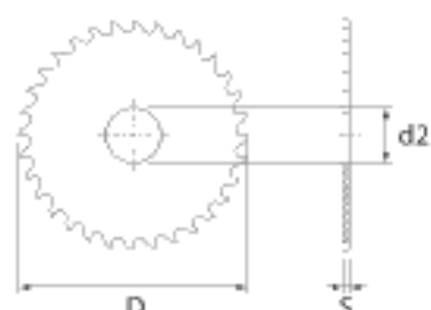

A5465	Tech. Code		D mm	S mm	d2 mm	Z
	A54650500,6		50	0.6	13	48
	A54650500,8			0.8		40
	A54650501			1		
	A54650501,2			1.2		
	A54650501,6			1.6		32
	A54650502			2		
	A54650502,5			2.5	16	64
	A54650630,5		63	0.5		48
	A54650630,8			0.8		
	A54650631			1		40
	A54650631,2			1.2		
	A54650631,5			1.5		
	A54650631,6			1.6	32	
	A54650632			2		
	A54650633			3	24	
	A54650634			4		
	A54650635			5		
	A54650800,5			80	0.5	22
	A54650800,8		0.8			
	A54650801		1		48	

A5465	Tech. Code		D mm	S mm	d2 mm	Z	
	A54650801,2		80	1.2	22	48	
	A54650801,6			1.6		40	
	A54650802			2			
	A54650803			3		32	
	A54650804			4			
	A54650805			5		64	
	A54651000,8		100	0.8	22		
	A54651001			1			
	A54651001,5			1.5	48		
	A54651001,6			1.6			
	A54651002			2	40		
	A54651003			3			
	A54651004		125	4	80		
	A54651250,8			0.8			
	A54651251			1	64		
	A54651252			2			
	A54651252,5			2.5	48		
	A54651253			3			
	A54651254			4	40		
	A54651255			5			

TU-KOY SLITTING SAW HOLDERS DIN 1837-A AND DIN 1838-B

ITEM: C3230



Tech. Code	D1 mm	D2 mm	D3 mm	L mm
C323005	5	6	16	60
C323008	8		15	
C323010	10	8	19	62
C323013	13	10	24	69
C323016	16	12	31	78
C323022	22	16	40	86
C323032	32	25	68	124