

KERFOLG® EXTERNAL GROOVING ISO 7 BRAZED TOOLS


Brazer

ITEM: B2U92

0° Approach angle

DIN 4981
UNI 4100

Upon request, also available for left running
Minimum order quantity 2 pcs.

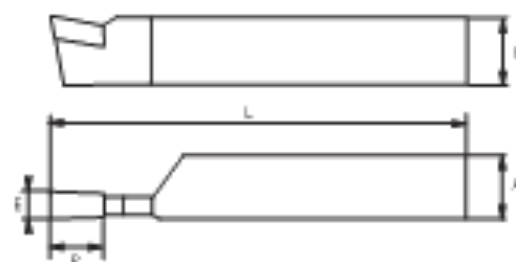

Tech. Code		B mm	A mm	L mm	E mm	P Carbide tip	Degree		
B2U921006P		10	6	90	3	D3	P		
B2U921208P		12	8	100					
B2U921610P		16	10	110	4	D4			
B2U922012P		20	12	125	5	D5			
B2U922516P		25	16	140	6	D6			
B2U923220P		32	20	170	8	D8			
B2U921006K		10	6	90	3	D3	K		
B2U921208K		12	8	100					
B2U921610K		16	10	110				4	D4
B2U922012K		20	12	125				5	D5

KERFOLG® INTERNAL GROOVING ISO 354R BRAZED TOOLS

Brazer

ITEM: B2U95

0° Approach angle

DIN 4971
UNI 4102R

Upon request, also available for left running
Minimum order quantity 2 pcs.



Tech. Code	A mm	B mm	D mm	L mm	L1 mm	E mm	P Carbide tip	Degree
B2U951010P	10	10	10	140	52	3	D3	P
B2U951212P	12	12	12	160	56	4	D4	
B2U951616P	16	16	16	180	63	5	D5	
B2U952020P	20	20	20	210	80	6	D6	
B2U952525P	25	25	25	250	100	8	D8	

KERFOLG® INTERNAL TURNING ISO 9 BRAZED TOOLS


Brazer

ITEM: B2U96

75° Approach angle

DIN 4974
UNI 4111

Upon request, also available for left running
Minimum order quantity 2 pcs.

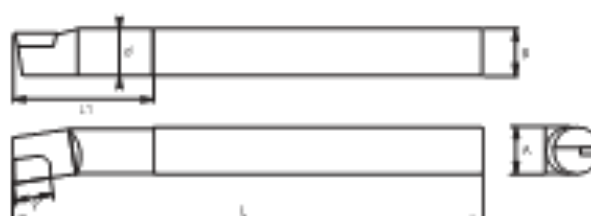

Tech. Code	A mm	B mm	D mm	L mm	L1 mm	P Carbide tip	Degree
B2U960808P	8	8	8	125	40	A5	P
B2U961010P	10	10	10	150	50	A6	
B2U961212P	12	12	12	180	63	A8	
B2U961616P	16	16	16	210	80	A10	
B2U962020P	20	20	20	250	100	A12	
B2U962525P	25	25	25	300	125	A16	
B2U963232P	32	32	32	355	160	A20	
B2U960808K	8	8	8	125	40	A5	K
B2U961010K	10	10	10	150	50	A6	
B2U961212K	12	12	12	180	63	A8	
B2U961616K	16	16	16	210	80	A10	
B2U962020K	20	20	20	250	100	A12	
B2U962525K	25	25	25	300	125	A16	
B2U963232K	32	32	32	355	160	A20	