


KERFOLG HYDRAULIC CHUCKS DIN 69893 HSK A

ITEM: C2031

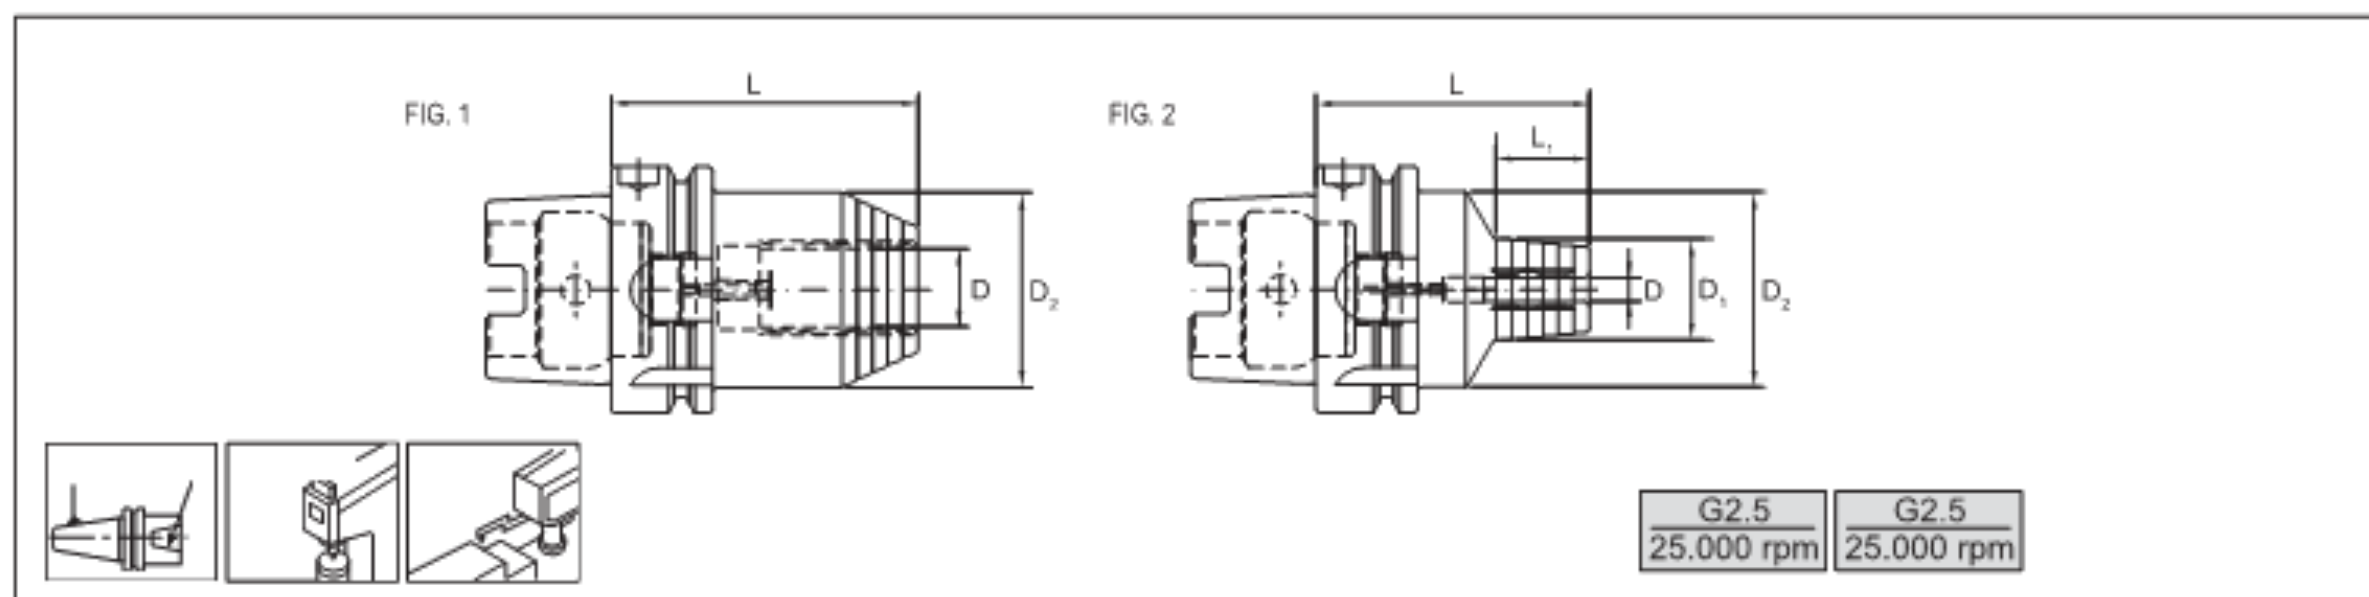

Tech. Code	HSK	D mm	L mm	D1 mm	D2 mm	L1 mm	Figure
C2031612085	63	12	85	32	50	40	2
C2031616090		16	90	38		46	
C2031620080*		20	80	-	51,5	-	1
C2031620090			90	42	50	48	2

* Short heavy duty design.


C2031120105	100	20	105	42	50	59	2
C2031132100		32	110	63	67	60	

For tools only with shank with tolerance h6. Always respect minimum clamping depth. Cooling tube not included.

- TUBES page C.78

KERFOLG HYDRAULIC CHUCKS STRONG LOCKING DIN 69893 HSK A

ITEM: C2032

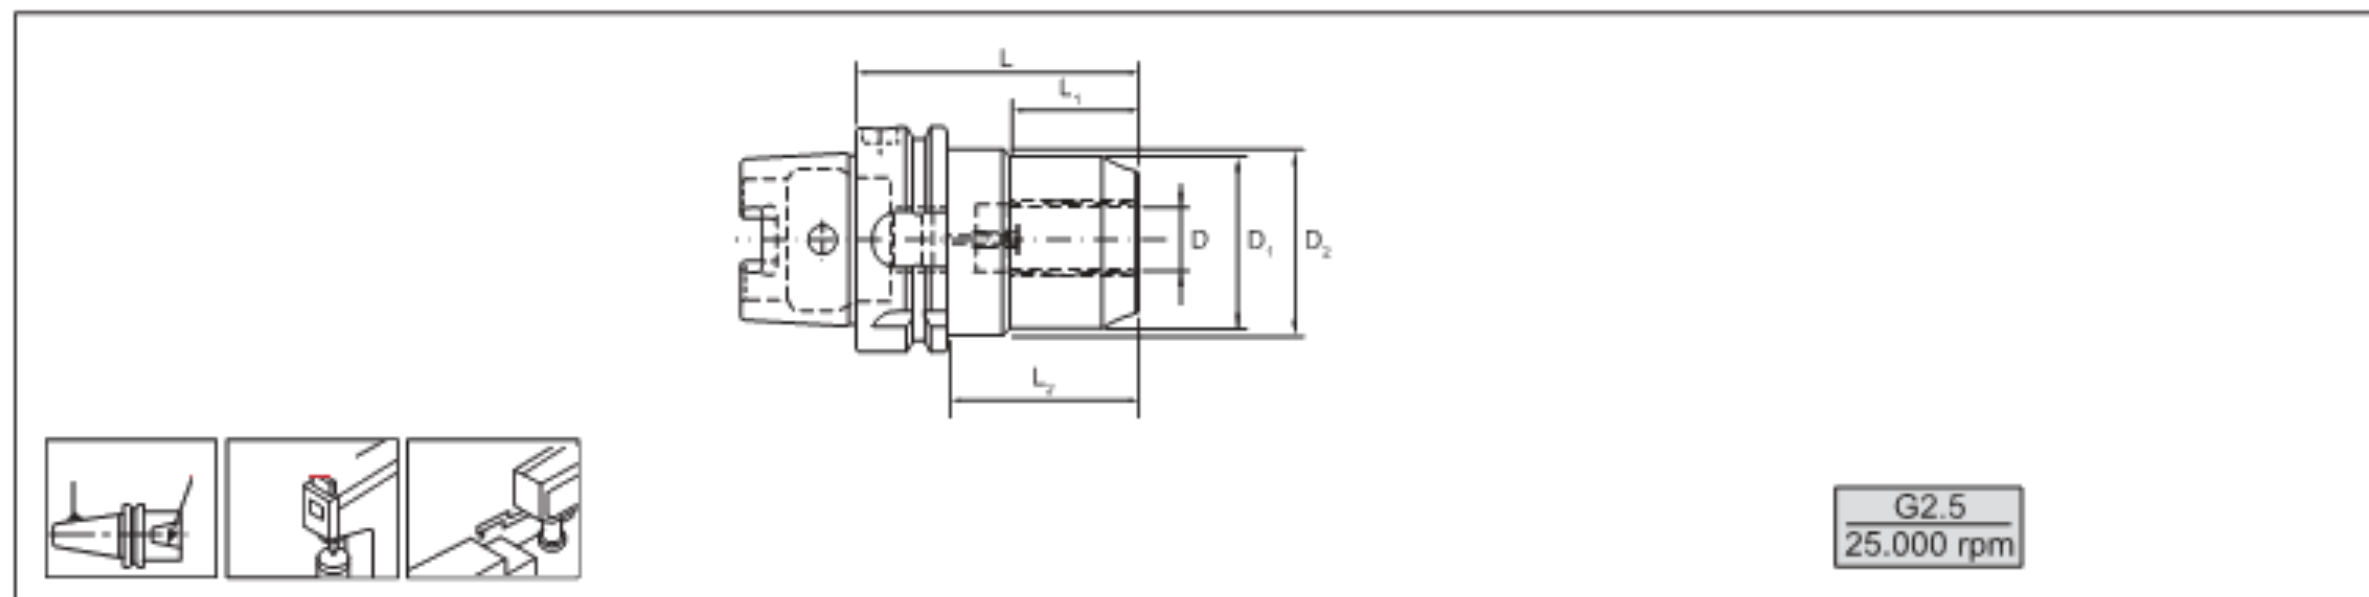

Tech. Code	HSK	D mm	L mm	L1 mm	L2 mm	D1 mm	D2 mm
C2032620080	63	20	80	36	51	49	52.5

FEATURES:

- Extremely high clamping force and radial stability
- Vibration damping tool clamping
- Very high transmissible torque
- All cylindrical shank h6 tolerance can be clamped
- Suitable for roughing milling operation
- Quick setup times
- Can be used flexibly by using reducing sleeves
- Narrow design 3°

For tools only with shank with tolerance h6.
Always respect minimum clamping depth.
Cooling tube not included.

- TUBES page C.78