















ITEM: CA018

Robust construction, water and coolant resistant. New technology with configurable


Automatic wake-up and sleeping mode, Absolute system.

ø 8 mm stem.

Tech. Code		Measuring range	Resolution	L
recii. Code		mm	mm	mm
D23301250001		0 ÷ 12,5	0.001	122.7
D2330125001			0.01	
D2330250001		0 + 25	0.001	148.3
D233025001			0.01	
D2330500001		0 + 50	0.001	263
D233050001			0.01	

ON-LINE MANUAL

Tech. Code	Model	
D99113V	Battery 3V DL2032 - CR2032	
D0002USB	Connection cable Proximity-USB	
D0002RS232	Proximity -cable RS232	

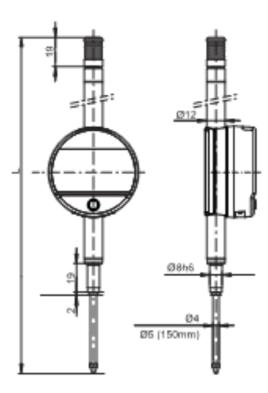

## **DIGITAL DIAL INDICATORS**
















Multifunctional ABSOLUTE Digimatic dial indicators, robust and easy to use. ABSOLUTE scale, which means there is no need to reset the instrument every time you switch it on. Large font size for easy reading.

330° rotatable display.

Display block function against unwanted use. Spindle Ø 8 mm.

Tech. Code	Measuring range mm	Resolution mm
D23561270001	0 - 12.7	
D23562540001	0 - 25.4	0.001
D23565080001	0 - 50.8	

















ABSOLUTE Digital dial indicators. The zero setting takes place only once with storage until the next battery replacement. Measurement accuracy even at maximum speeds. Large display with easy to read characters. Stem Ø 8 mm.

Tech. Code	Measuring range mm	Resolution mm
D2354127001	0 - 12,7	0,01