

CA 1

90°
Angle head

Technical Data

Caractéristiques techniques / Technische Daten

 ER-32 / 20 mm

R.P.M max Heavy duty bearings **3.000**

 **7.5 kg**

 **1:1**

KW **7 kW**

Nm max **35 Nm**



Rotation in = out

L / H

Other measures under request

Autres mesures sur demande

Weitere Maßnahmen auf Anfrage

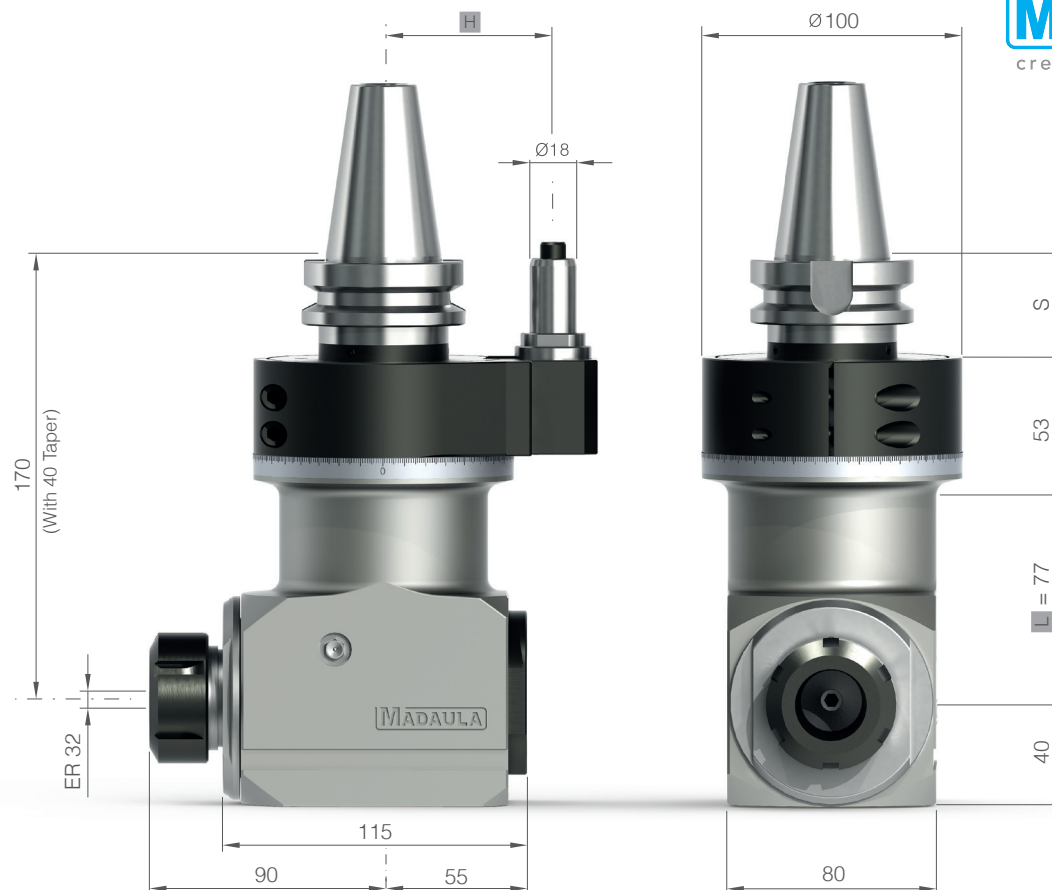

Taper
Cône / Kegel

Size
Taille / Größe

H

S

DIN 69871 / 2080 40/50 65/80 40

CAT 40/50 65/80 40

MAS-BT 40/50 65/80 40/50


HSK 63/100 65/80 40/50

CAPTO C6/C8 65/80 40/50

KM 63/100 65/80 40/50

Standard Equipment
Standard / Standard

Optional Equipment
Optionel / Option



Stop Block

Bloc d'arrêt / Anschlag-Block

See page 55 

Collets

Pinces / Spannzangen

See page 56 

Coolant through index pin

Arrosage par le doigt d'indexage / Kühlmittelzufuhr durch bolzen

bar/psi max 12/175

High speed option RPM max

Haute vitesse en option RPM / Hochgeschwindigkeit optional UPM max

6.000