

CA



90°
Angle head

Technical Data

Caractéristiques techniques / Technische Daten



ISO-40 / DIN-2079

R.P.M max **Heavy duty bearings** 2.000



20 kg



1:1

KW 20 kW

Nm max 130 Nm



Rotation in = out

L / H

Other measures under request

Autres mesures sur demande

Weitere Maßnahmen auf Anfrage

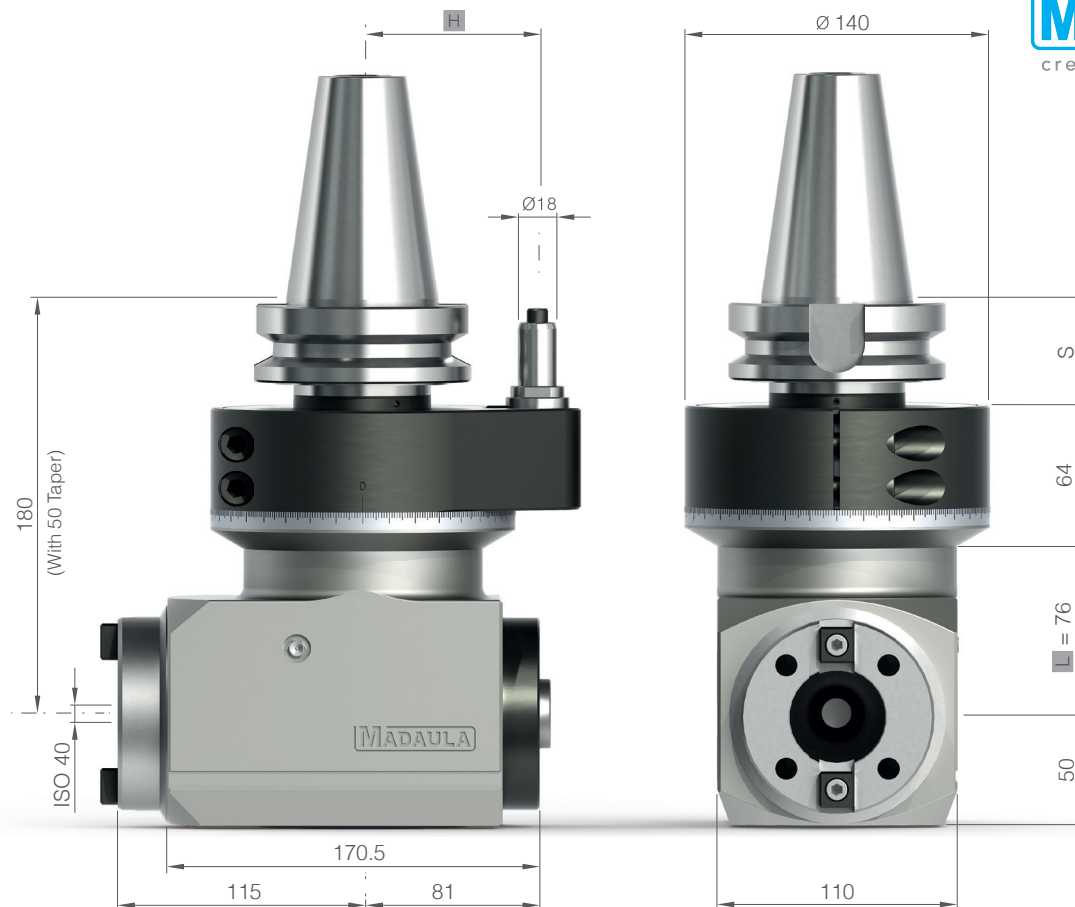

MADAULA
creative solutions

Taper

Cône / Kegel

Size

Taille / Größe

H

S


DIN 69871 / 2080	50	80	40
CAT	50	80	40
MAS-BT	50	80	50
HSK	80/100	80	40/50
CAPTO	C8	80	50
KM	80/100	80	40/50

Standard Equipment

Standard / Standard

Optional Equipment

Optionel / Option



Stop Block

Bloc d'arrêt / Anschlag-Block

See page 55

Collets

Pinces / Spannzangen

See page 56

Coolant through index pin

Arrosage par le doigt d'indexage / Kühlmittelzufuhr durch bolzen

bar/psi max 12/175

High speed option RPM max

Haute vitesse en option RPM / Hochgeschwindigkeit optional UPM max

4.000