

Technical Data

Caractéristiques techniques / Technische Daten


	ER-32 / 20 mm
R.P.M max	Heavy duty bearings 3.000
	8 kg
	1:1
KW	7 kW
Nm max	35 Nm
Rotation	in = out
Coolant max pressure	12 bar / 175 psi

L / H


Other measures under request

Autres mesures sur demande

Weitere Maßnahmen auf Anfrage




Internal Coolant

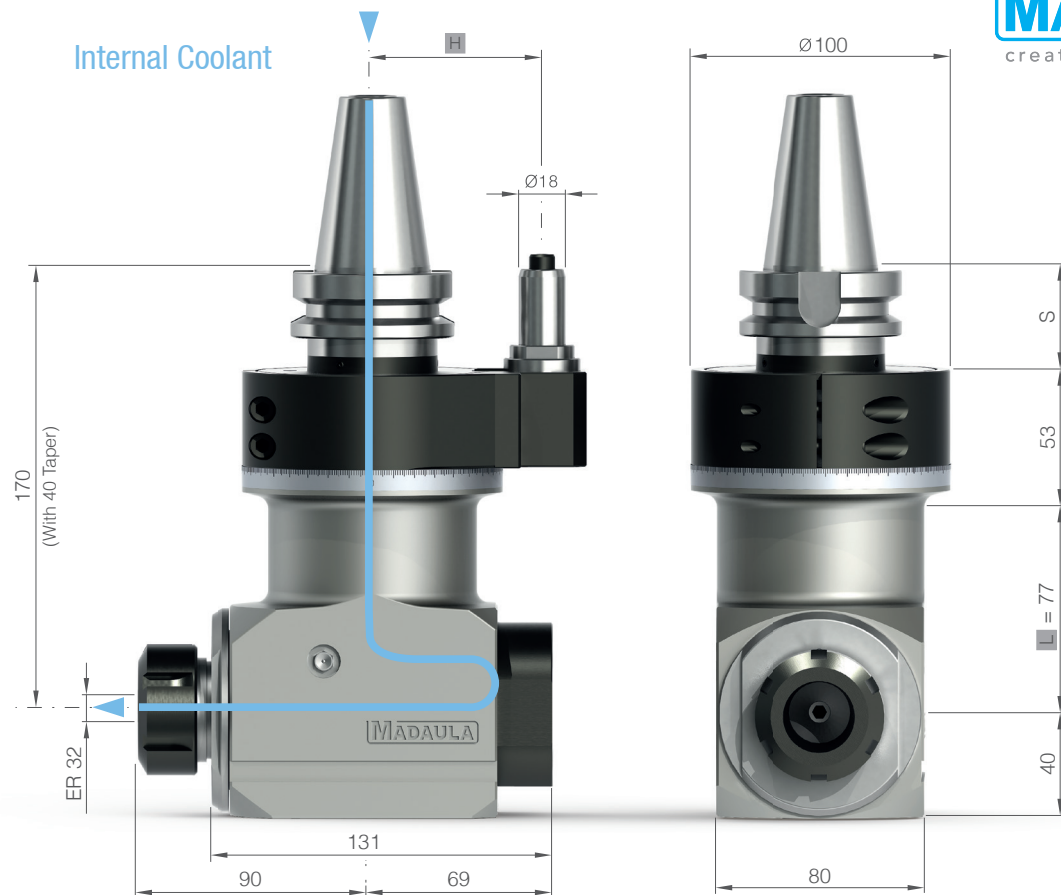

Taper Cône / Kegel	Size Taille / Größe	H	S
DIN 69871 / 2080	40/50	65/80	40
CAT	40/50	65/80	40
MAS-BT	40/50	65/80	40/50
HSK	63/100	65/80	40/50
CAPTO	C6/C8	65/80	40/50
KM	63/100	65/80	40/50

Standard Equipment

Standard / Standard



Optional Equipment

Optionel / Option

Stop Block

Bloc d'arrêt / Anschlag-Block

See page 55 

Collets

Pinces / Spannzangen

See page 56 

Alternative outputs

Sortie alternative / Alternative ausgänge

See page 55 

High speed option RPM max

Haute vitesse en option RPM / Hochgeschwindigkeit optional UPM max

6.000