

CAR 1

0–90°
Adjustable

Technical Data

Caractéristiques techniques / Technische Daten

 ER-25 / 16 mm

R.P.M max 4.000

 7 kg

 1:1

KW 5 kW

Nm max 12 Nm



Rotation in ≠ out

L / H

Other measures under request

Autres mesures sur demande

Weitere Maßnahmen auf Anfrage

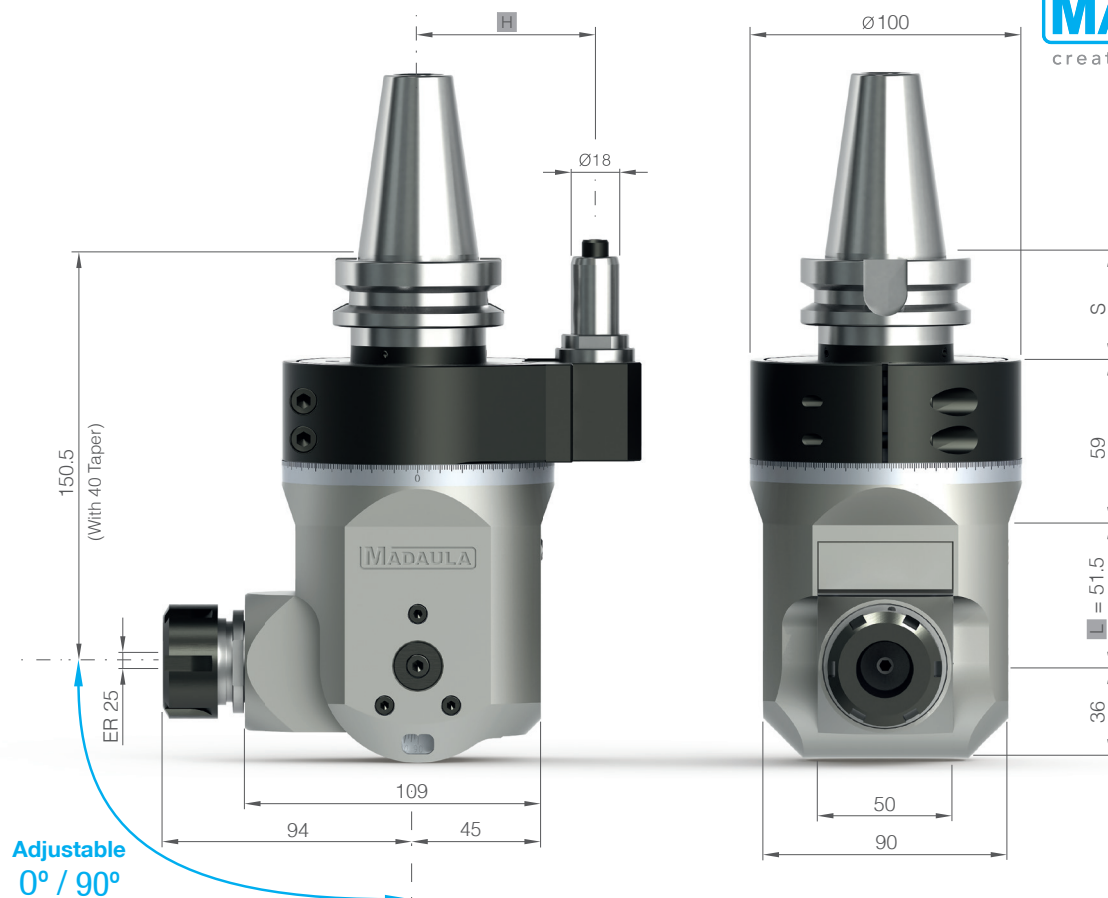

MADAULA
creative solutions

Taper
Cône / Kegel

Size
Taille / Größe

H

S

DIN 69871 / 2080 40/50 65/80 40

CAT 40/50 65/80 40

MAS-BT 40/50 65/80 40/50


HSK 63/100 65/80 40/50

CAPTO C6/C8 65/80 40/50

KM 63/100 65/80 40/50

Standard Equipment
Standard / Standard

Optional Equipment
Optionel / Option



Stop Block

Bloc d'arrêt / Anschlag-Block

See page 55 

Collets

Pinces / Spannzangen

See page 56 

Coolant through index pin

Arrosage par le doigt d'indexage / Kühlmittelzufuhr durch bolzen

bar/psi max 12/175