

CAR 2 0-90° Adjustable

Technical Data

Caractéristiques techniques / Technische Daten

 ER-32 / 20 mm

R.P.M max Heavy duty bearings 4.000

 15.5 kg

 1:1

KW 6 kW

Nm max 22 Nm


Rotation in ≠ out

L / H

Other measures under request

Autres mesures sur demande

Weitere Maßnahmen auf Anfrage



Adjustable
0° / 90°

Taper	Size	H	S
Cône / Kegel	Taille / Größe		

DIN 69871 / 2080	50	80	40
------------------	----	----	----

CAT	50	80	40
-----	----	----	----

MAS-BT	50	80	50
--------	----	----	----


HSK	80/100	80	40/50
-----	--------	----	-------

CAPTO	C8	80	50
-------	----	----	----

KM	80/100	80	40/50
----	--------	----	-------

Standard Equipment
Standard / Standard

Optional Equipment
Optionel / Option



Stop Block

Bloc d'arrêt / Anschlag-Block

See page 55 

Collets

Pinces / Spannzangen

See page 56 

Coolant through index pin


Arrosage par le doigt d'indexage / Kühlmittelzufuhr durch bolzen

bar/psi max 12/175

High speed option RPM max

Haute vitesse en option RPM / Hochgeschwindigkeit optional UPM max

6.000

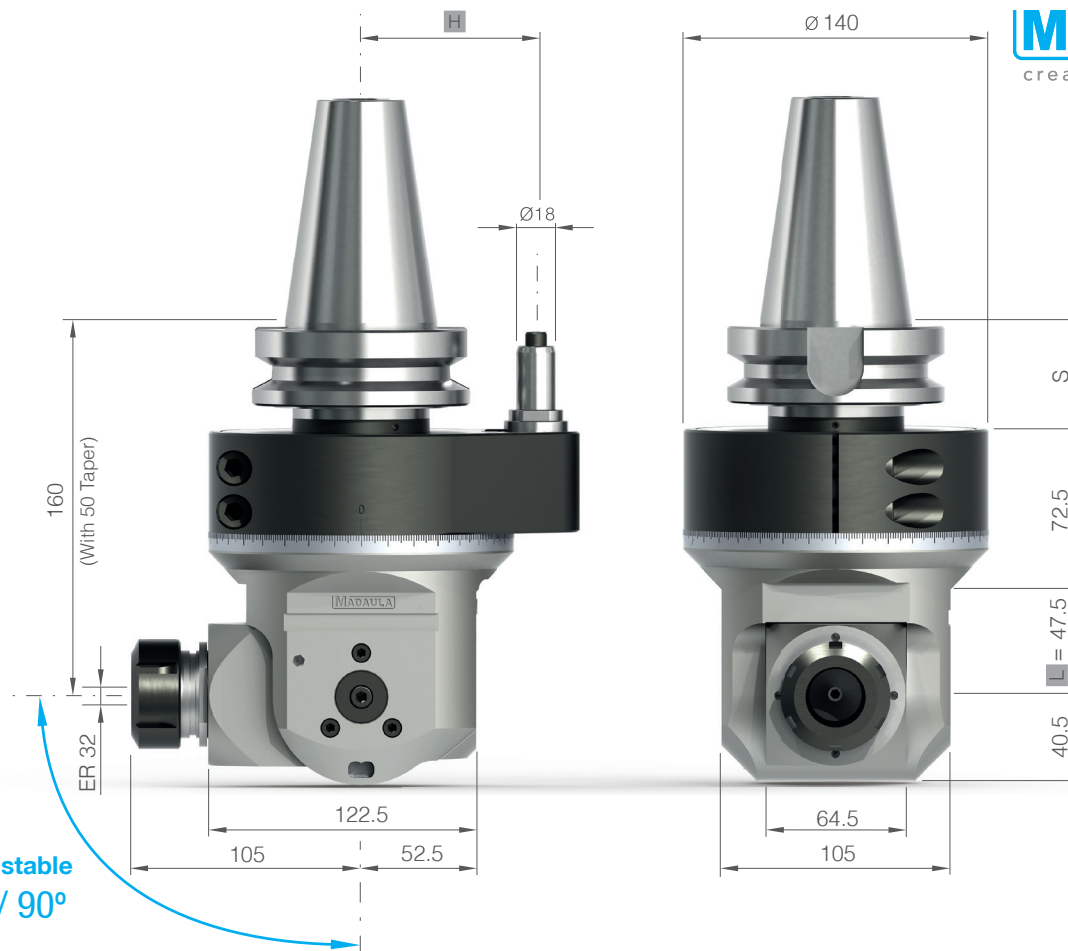

MADAULA
creative solutions