

CAR 3

0–90°
Adjustable

Technical Data

Caractéristiques techniques / Technische Daten



ER-40 / 26 mm

R.P.M max

Heavy duty bearings

3.000



22 kg



1:1

KW

10 kW

Nm max

40 Nm

Rotation


in ≠ out

L / H


Other measures under request

Autres mesures sur demande

Weitere Maßnahmen auf Anfrage



Adjustable
0° / 90°

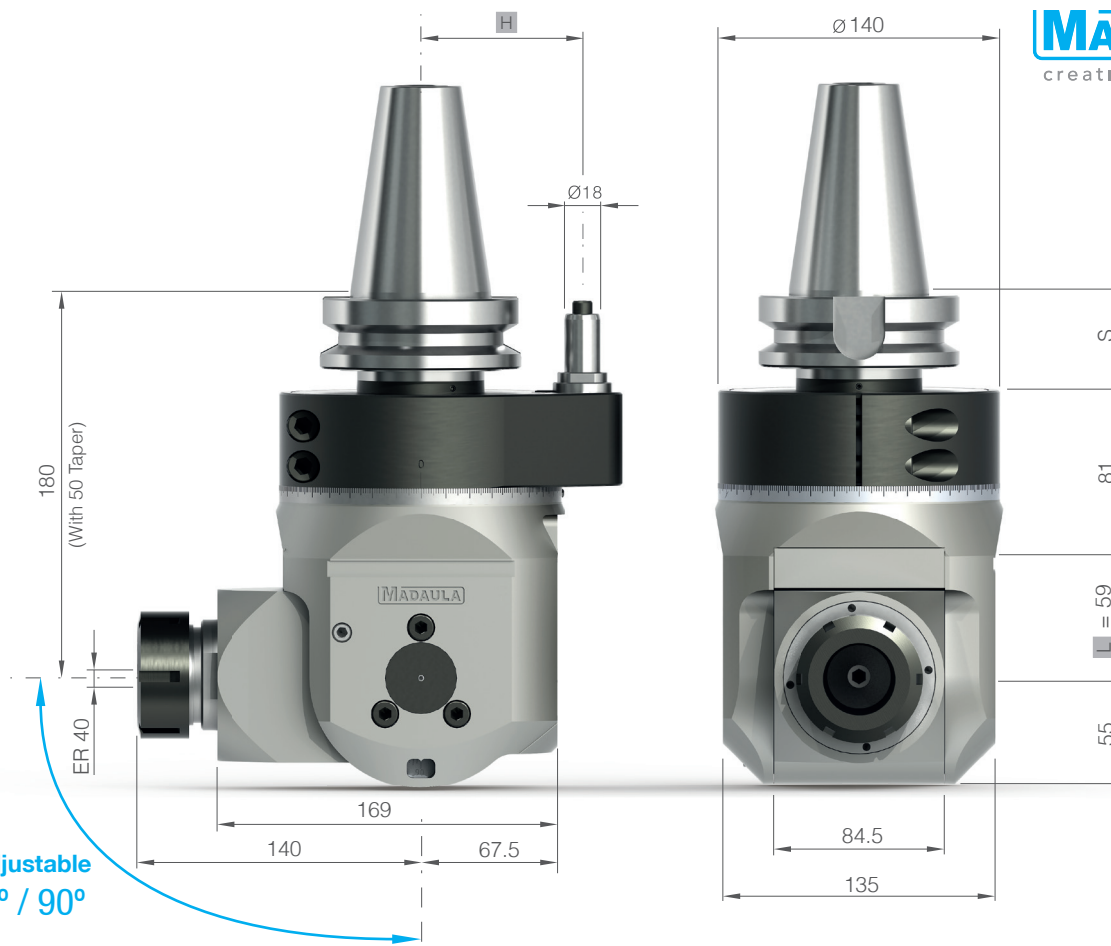

MADAULA
creative solutions

Taper

Cône / Kegel

Size

Taille / Größe

H

S

DIN 69871 / 2080

50

80

40

CAT

50

80

40

MAS-BT

50

80

50

HSK

80/100

80

40/50

CAPTO

C8

80

50

KM

80/100

80


40/50

Standard Equipment

Standard / Standard

Optional Equipment

Optionel / Option



Stop Block

Bloc d'arrêt / Anschlag-Block

See page 55



Collets

Pinces / Spannzangen

See page 56



Coolant through index pin

Arrosage par le doigt d'indexage / Kühlmittelzufuhr durch bolzen

bar/psi max 12/175

High speed option RPM max

Haute vitesse en option RPM / Hochgeschwindigkeit optional UPM max

4.000