

CAR 4 $\pm 120^\circ$ Adjustable

Technical Data

Caractéristiques techniques / Technische Daten



	ISO-40 / BT-40
R.P.M max	3.500
	64 kg
	1:1
KW	20 kW
Nm max	100 Nm
Rotation	in $\neq$ out

L / H

Other measures under request

Autres mesures sur demande

Weitere Maßnahmen auf Anfrage

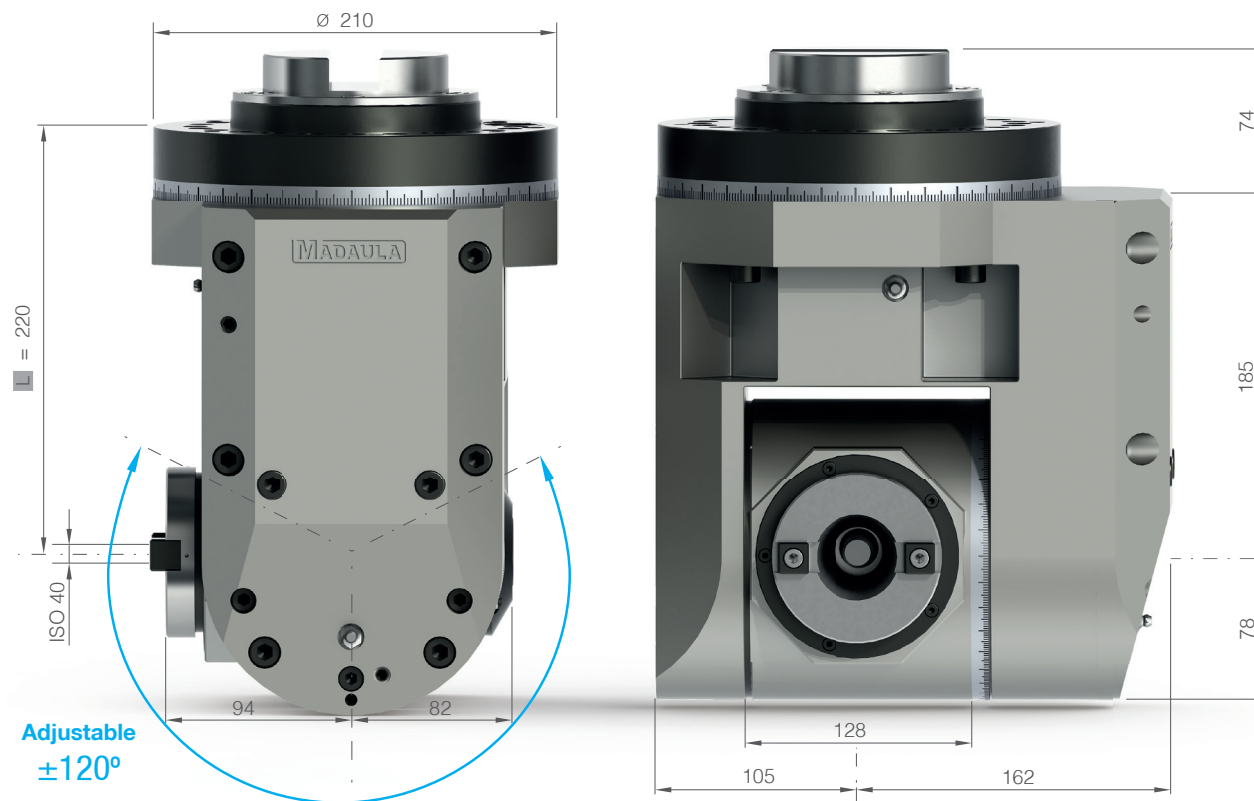

Flange mounted giving an increased rigidity.


Rigidité accrue lors du montage par flasque sur la machine.

Erhöhte Starrheit durch Flanscheinbau direkt an die Maschine.



Standard Equipment

Standard / Standard



Optional Equipment

Optionel / Option

Internal air pressure

Suppression d'air interne / Sperrluft

bar/psi max 0.3/4

Quick change system

Système de changement rapide / Schnellwechselaufnahme

Alternative output HSK 63

Sortie alternative HSK 63 / Alternative ausgänge HSK 63

See page 55

X3 Increaser: max speed RPM

X3 Multiplicateur: vitesse max RPM / X3 Übersetzungsverhältnis: höchste Drehzahl UPM 6.000