

## Technical Data

Caractéristiques techniques / Technische Daten



|                                                                                   |                |
|-----------------------------------------------------------------------------------|----------------|
|  | ISO-50 / BT-50 |
| <b>R.P.M max</b>                                                                  | 3.000          |
|  | 150 kg         |
|  | 1:1            |
| <b>KW</b>                                                                         | 35 kW          |
| <b>Nm max</b>                                                                     | 500 Nm         |
| <b>Rotation</b>                                                                   | in = out       |

## L

### Other measures under request

Autres mesures sur demande


Weitere Maßnahmen auf Anfrage

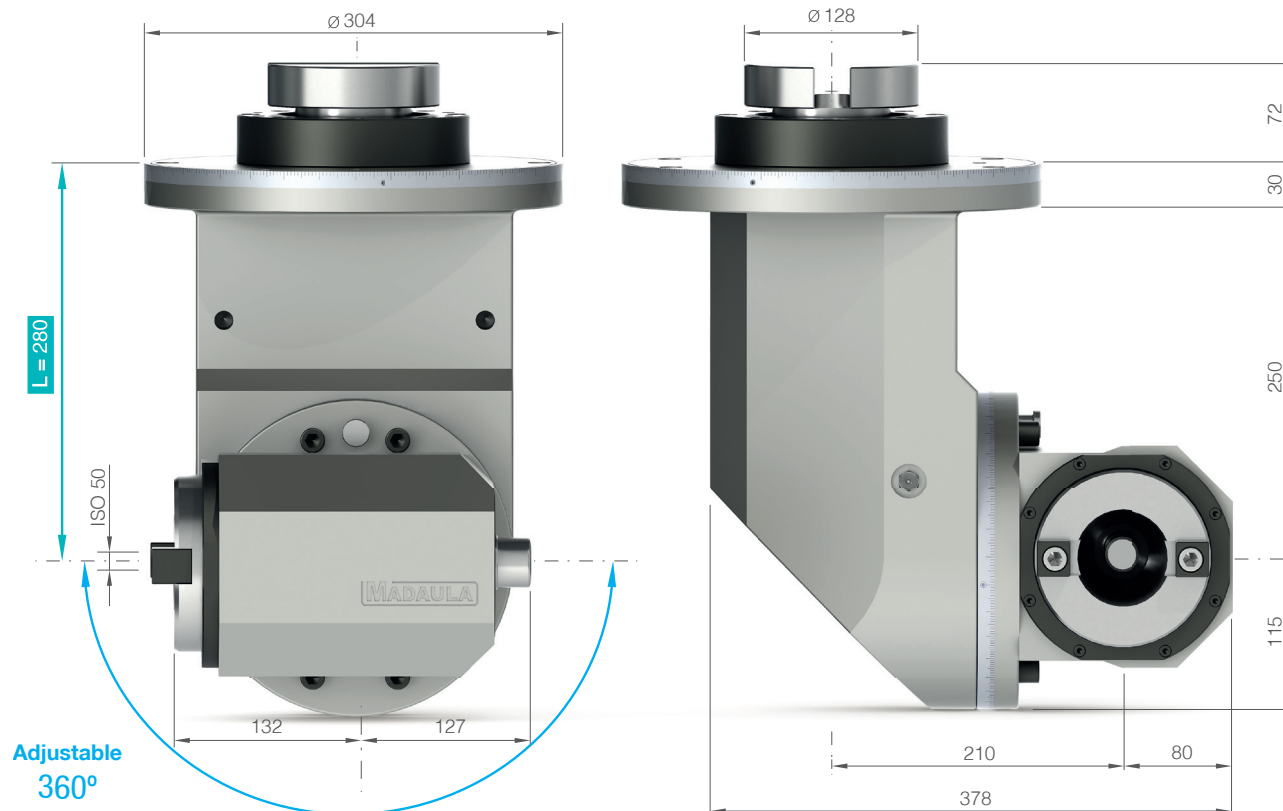

## Flange mounted giving an increased rigidity.


Rigidité accrue lors du montage par flasque sur la machine.

Erhöhte Starrheit durch Flanscheinbau direkt an die Maschine.



## Standard Equipment

Standard / Standard



## Optional Equipment

Optionel / Option

### Internal air pressure

Surpression d'air interne / Sperrluft

bar/psi max 0.3/4

### Quick change system

Système de changement rapide / Schnellwechselaufnahme

### Alternative output HSK 63

Sortie alternative HSK 63 / Alternative ausgänge HSK 63

See page 55