

CAFS 3 0 to 90° Fixed offset

Technical Data

Caractéristiques techniques / Technische Daten

 ER-40 / 26 mm

R.P.M max **Heavy duty bearings** **3.500**

 **15.8 kg**

 **1:1**

KW **10 kW**

Nm max **80 Nm**


Rotation **in ≠ out**

L / H / α

Other measures under request

Autres mesures sur demande

Weitere Maßnahmen auf Anfrage

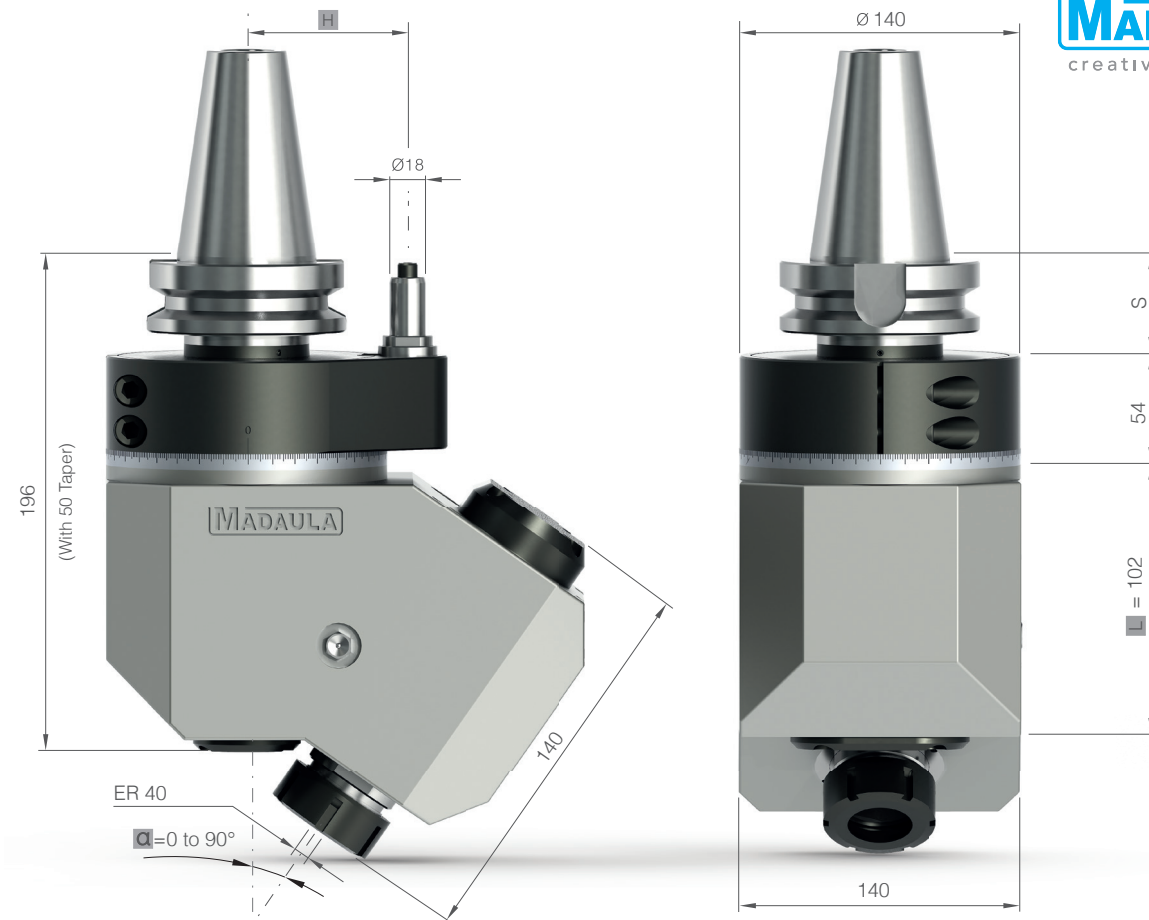

ER 40

α = 0 to 90°

Taper

Cône / Kegel

Size

Taille / Größe

H

S

DIN 69871 / 2080 50 80 40

CAT 50 80 40

MAS-BT 50 80 50

HSK 80/100 80 40/50

CAPTO C8 80 50


KM 80/100 80 40/50

Standard Equipment

Standard / Standard

Optional Equipment

Optionel / Option



Stop Block

Bloc d'arrêt / Anschlag-Block

See page 55 

Collets

Pinces / Spannzangen

See page 56 

Coolant through index pin

Arrosage par le doigt d'indexage / Kühlmittelzufuhr durch bolzen

bar/psi max 12/175

High speed option RPM max

Haute vitesse en option RPM / Hochgeschwindigkeit optional UPM max

6.000