

CAD

90°
Double output

Technical Data

Caractéristiques techniques / Technische Daten



	ER-25A / 16 mm
R.P.M max	5.000
	5.2 kg
	1:1
KW	3.5 kW
Nm max	14 Nm
Rotation	in ≠ out / in = out

L / H

Other measures under request

Autres mesures sur demande


Weitere Maßnahmen auf Anfrage

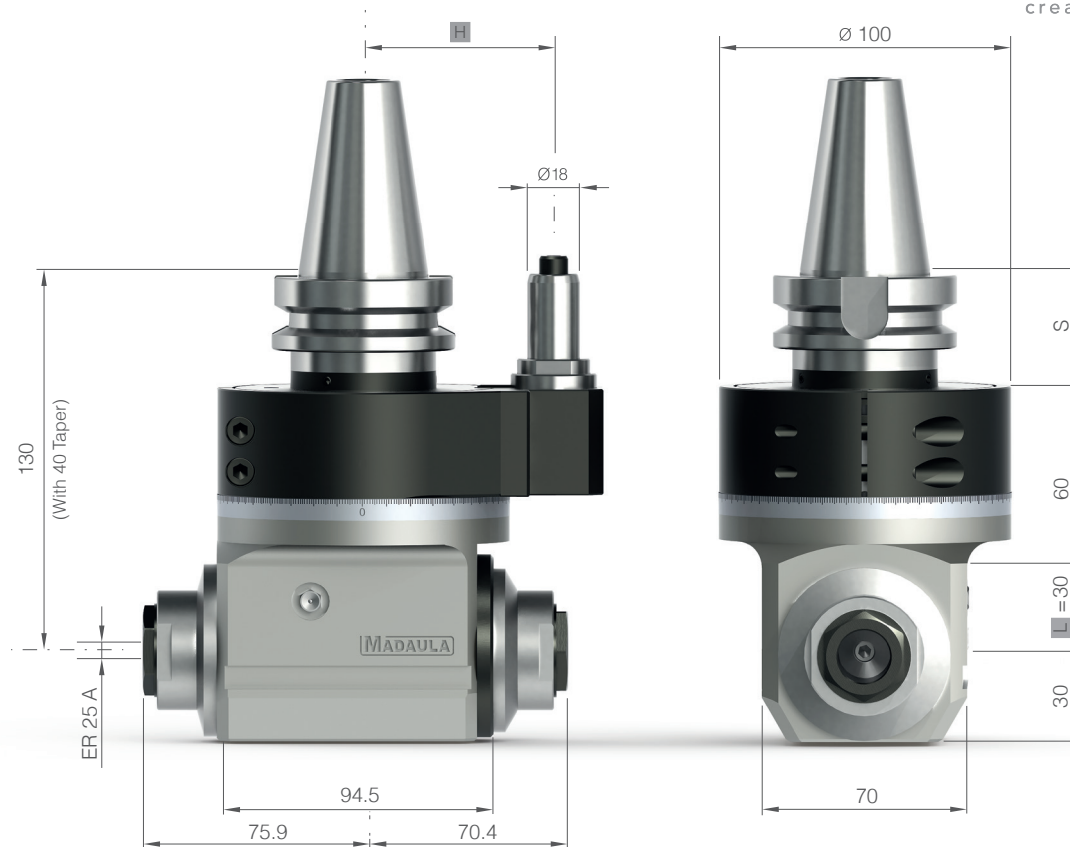

Taper Cône / Kegel	Size Taille / Größe	H	S
DIN 69871 / 2080	30/40/50	55/65/80	40
CAT	30/40/50	55/65/80	40
MAS-BT	30/40/50	55/65/80	40/40/50
HSK	50/63/100	55/65/80	40/40/50
CAPTO	C5/C6/C8	55/65/80	40/40/50
KM	50/63/100	55/65/80	40/40/50

Standard Equipment

Standard / Standard



Optional Equipment

Optionel / Option

Stop Block

Bloc d'arrêt / Anschlag-Block

See page 55 

Collets

Pinces / Spannzangen

See page 56 

Coolant through index pin

Arrosage par le doigt d'indexage / Kühlmittelzufuhr durch bolzen

bar/psi max 12/175

High speed option RPM max

Haute vitesse en option RPM / Hochgeschwindigkeit optional UPM max

8.000