

CAP 4 Slim design 90°

Technical Data

Caractéristiques techniques / Technische Daten

 ER-25A / 16 mm

R.P.M max Heavy duty bearings **4.000**

 **12 kg**

 **1:1**

KW **7 kW**

Nm max **40 Nm**



Rotation
in = out (A-C)
in ≠ out (B)

L / H

Other measures under request

Autres mesures sur demande

Weitere Maßnahmen auf Anfrage

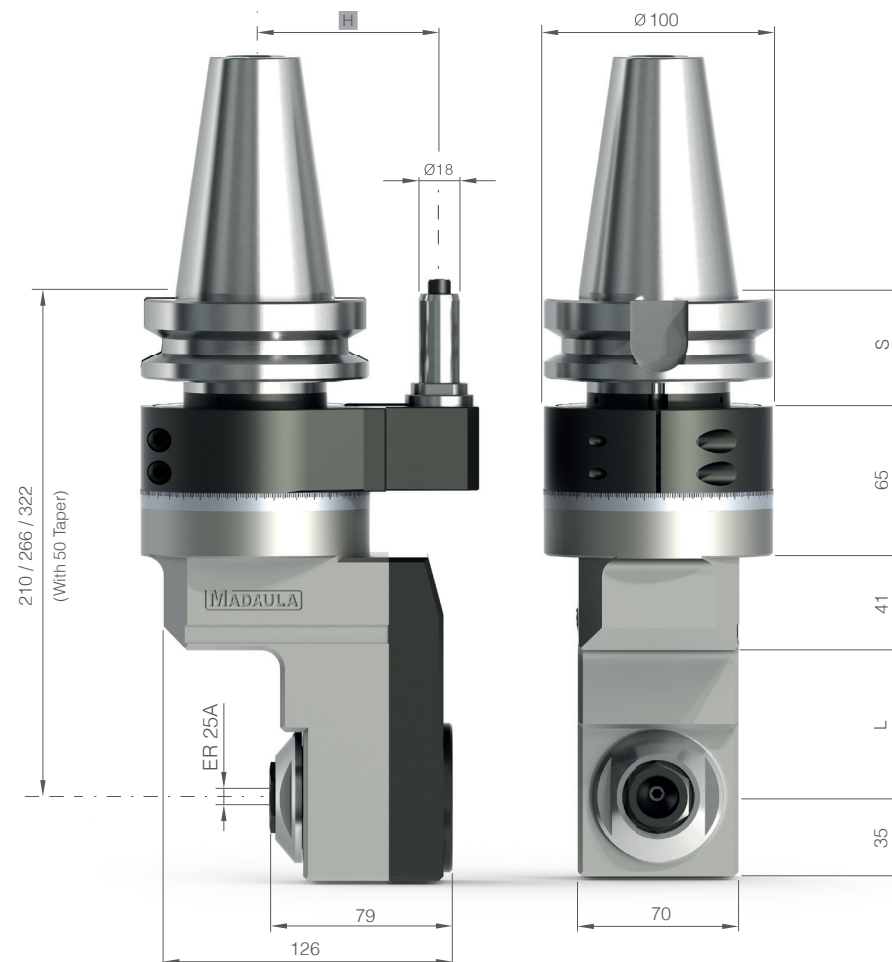

L	A	64
	B	120
	C	175

Taper Cône / Kegel	Size Taille / Größe	H	S
-----------------------	------------------------	---	---

DIN 69871 / 2080	50	80	40
------------------	----	----	----

CAT	50	80	40
-----	----	----	----

MAS-BT	50	80	50
--------	----	----	----


HSK	80/100	80	40/50
-----	--------	----	-------

CAPTO	C8	80	50
-------	----	----	----

KM	80/100	80	40/50
----	--------	----	-------

Standard Equipment
Standard / Standard

Optional Equipment
Optionel / Option



Stop Block

Bloc d'arrêt / Anschlag-Block

See page 55 

Collets

Pinces / Spannzangen

See page 56 

Coolant through index pin

Arrosage par le doigt d'indexage / Kühlmittelzufuhr durch bolzen

bar/psi max 12/175

High speed option RPM max

Haute vitesse en option RPM / Hochgeschwindigkeit optional UPM max

8.000