

CAP 6 Slim design 90°

Technical Data

Caractéristiques techniques / Technische Daten

 ER-40A / 26 mm

R.P.M max Heavy duty bearings **3.000**

 **16 kg**

 **1:1**

KW **20 kW**

Nm max **130 Nm**



Rotation
in = out (A-C)
in ≠ out (B)

L / H

Other measures under request

Autres mesures sur demande

Weitere Maßnahmen auf Anfrage

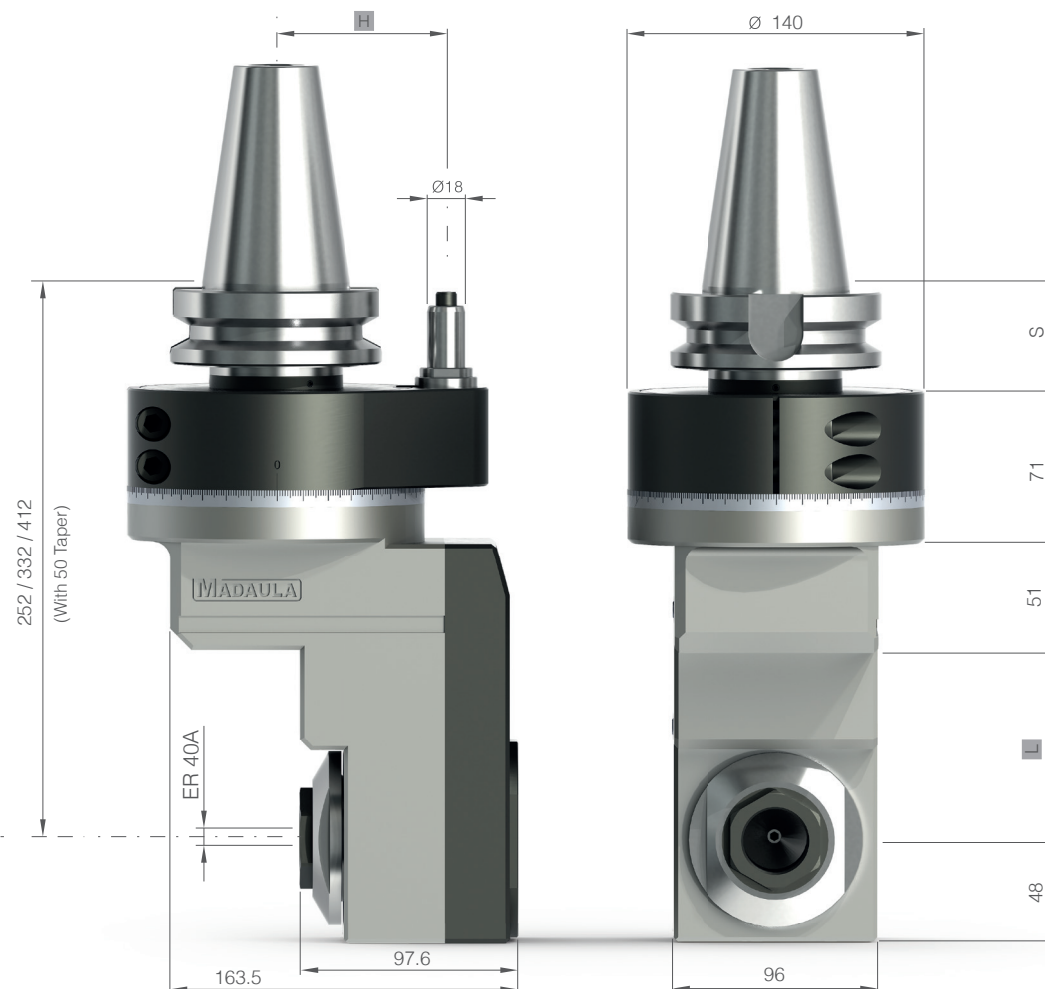

MADAULA
creative solutions

L	A	90
	B	170
	C	250

Taper	Size	H	S
Cône / Kegel	Taille / Größe		

DIN 69871 / 2080	50	80	40
------------------	----	----	----

CAT	50	80	40
-----	----	----	----


MAS-BT	50	80	50
--------	----	----	----

HSK	80/100	80	40/50
-----	--------	----	-------

CAPTO	C8	80	50
-------	----	----	----

KM	80/100	80	40/50
----	--------	----	-------

Standard Equipment
Standard / Standard



Optional Equipment
Optionel / Option

Stop Block
Bloc d'arrêt / Anschlag-Block

See page 55 

Collets
Pincers / Spannzangen

See page 56 

Coolant through index pin
Arrosage par le doigt d'indexage / Kühlmittelzufuhr durch bolzen

bar/psi max 12/175

High speed option RPM max
Haute vitesse en option RPM / Hochgeschwindigkeit optional UPM max

4.000