


CABLE GLANDS

Cable Glands Polyamide

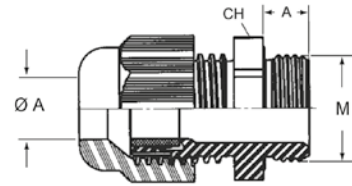


| Part No. | Ø A (mm) | M | CH | A | |
|----------|----------|-----|----|----|---|
| ASM20I | 5-12,5 | M20 | 24 | 10 | 1 |
| ASM25I | 9-18 | M25 | 33 | 10 | 1 |
| ASM32I | 14-25 | M32 | 42 | 10 | 1 |

A Polyamide based cable gland, designed for universal use.

Benefits

High oil-resistance for maximum reliability.
Permanent vibration protection.
Wide, variable clamping ranges.
Optimum strain relief.

Cable Glands Polyamide - with Spiral Strain Relief

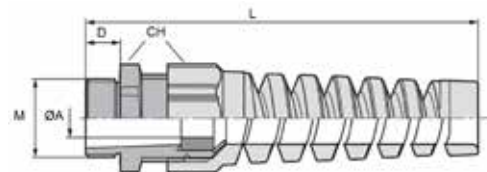


| Part No. | Ø A (mm) | M | CH | L | D | |
|----------|----------|-----|----|-----|----|---|
| CGSS20 | 7-13 | M20 | 24 | 101 | 8 | 1 |
| CGSS25 | 9-17 | M25 | 33 | 125 | 9 | 1 |
| CGSS32 | 11-22 | M32 | 42 | 149 | 10 | 1 |

Plastic cable gland with bending and anti-kink protection, to protect flexible cables, for moving machine parts.

Benefits

Reliable bending and anti-kink protection.
Cable conservation.
Functional reliability.
To protect flexible cables.

Cable Glands



| Part No. | Ø A (mm) | M | CH | L | B | |
|----------|----------|-----|----|------|-----|---|
| AGM20T | 6-10 | M20 | 20 | 10,5 | 7,5 | 1 |
| AGM25T | 11-17 | M25 | 25 | 11,5 | 8 | 1 |
| AGM32T | 19-24 | M32 | 32 | 12 | 8 | 1 |

Metal cable gland with gasket to ensure sealed connection between cable and connector.

Benefits

IP65.
Temperature range: -25°C - +100°C.
Nickel plated brass gland.
Anti-ageing rubber gaskets.
Galvanised steel washers.