

STRAIGHT FLUTE TAP FOR BLIND AND THROUGH HOLES - NPT


KERFOLG

NEW



ITEM: A2655
NPT tapered thread taper ratio 1:16

Surface finish Bright
Hole type Blind and through
Thread depth ≤ 2XD
Chamfer form C 2/3 Alternate teeth
Application General application

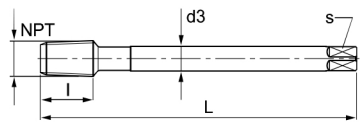

< 500	< 850	< 1200	< 600	< 850	Duplex	< 240	< 300	< 10% Si	> 10% Si	Brass Copper	Bronze >700	Ti6Al4V	HTA	< 45	< 60
●	●		○	○		●		○	○		○				

Tech. Code	NPT	TPI	L mm	I mm	d3 mm	s mm
A2655NPT1/16	1/16"	27	90	12	6	4.9
A2655NPT1/8	1/8"	27	100	12	7	5.5
A2655NPT1/4	1/4"	18	100	18	11	9
A2655NPT3/8	3/8"	18	110	18	12	9


Tech. Code	NPT	TPI	L mm	I mm	d3 mm	s mm
A2655NPT1/2	1/2"	14	140	23	16	12
A2655NPT3/4	3/4"	14	150	24	20	16
A2655NPT1	1"	11,1/2	170	30	25	20

STRAIGHT FLUTE TAP FOR BLIND AND THROUGH HOLES - PG

WRK



ITEM: A2660
Surface finish Bright
Hole type Blind and through
Thread depth ≤ 1.5XD
Chamfer form C 2/3
Application Low and medium strength steel ≤ 800 N/mm²



< 500	< 850	< 1200	< 600	< 850	Duplex	< 240	< 300	< 10% Si	> 10% Si	Brass Copper	Bronze >700	Ti6Al4V	HTA	< 45	< 60
●								●							

Tech. Code	PG	d x p mm	L mm	I mm	d3 mm	s mm	Tapping hole mm	DIN
A2660PG7	7	12.5 x 20	70	20	9	7	11.4	40432
A2660PG9	9	15.2 x 18	70	20	12	9	14	40432
A2660PG11	11	18.6 x 18	80	22	14	11	17.25	40432

Tech. Code	PG	d x p mm	L mm	I mm	d3 mm	s mm	Tapping hole mm	DIN
A2660PG13,5	13.5	20.4 x 18	80	22	16	12	19	40432
A2660PG16	16	22.5 x 18	80	22	18	14.5	21.25	40432
A2660PG21	21	28.3 x 16	90	22	22	18	27	40432

Related products

BOWERS FAST ACTION DIGITAL MICROMETERS - BLUETOOTH - IP67

Tech. Code	Range mm	Depth mm	Accuracy μm
D1276050065	50 ÷ 65	80	5
D1276065080	65 ÷ 80		
D1276080100	80 ÷ 100	85	



The products are available in chapter D