





CONNECTORS

Inserts Male





Part No.	# Poles	A	B	L	L1	Size
CNEM06T	6 Pole	50	34	33	18	44,27
CNEM10T	10 Pole	63,4	34	33	18	57,27
CNEM16T	16 Pole	83,5	34	33	18	77,27
CNEM24T	24 Pole	110,3	34	33	18	104,27

Inserts Female





Part No.	# Poles	A	B	L	L1	Size
CNEF06T	6 Pole	50	34	33	18	44,27
CNEF10T	10 Pole	63,4	34	33	18	57,27
CNEF16T	16 Pole	83,5	34	33	18	77,27
CNEF24T	24 Pole	110,3	34	33	18	104,27

Top Entry Hood, Single Lever





Part No.	# Poles	Levers	A	B	C	L	L1	M	Size
MHV06L20	6 Pole	Single	72	43	60	53	40	M20	44,27
MHV10L20	10 Pole	Single	87	43	73	58	45	M20	57,27
MHV16L25	16 Pole	Single	108	43	93,5	58	45	M25	77,27
MHV24L32	24 Pole	Single	135	43	120	68	55	M32	104,27

Side Entry Hood, Single Lever






Part No.	# Poles	Levers	A	B	C	L	L1	M	Size
MHO06L20	6 Pole	Single	73	43	60	50,4	47	M20	44,27
MHO10L20	10 Pole	Single	87	43	73	52	49	M20	57,27
MHO16L25	16 Pole	Single	108	43	93,5	63	60	M25	77,27
MHO24L32	24 Pole	Single	135	43	120	63	60	M32	104,27

Panel Mount Base, Single Lever





Part No.	# Poles	Levers	A	B	L	Size
CHI06L	6 Pole	Single	82,5	45,5	29	44.27
CHI10L	10 Pole	Single	95,5	45,5	29	57.27
CHI16L	16 Pole	Single	115,5	45,5	29	77.27
CHI24L	24 Pole	Single	142,5	45,5	29	104.27

Surface Mount Base, Single Lever



Part No.	# Poles	Levers	A	B	C	L	M	Size
MHP06L20	6 Pole	Single	82	52	70	53	M20	44.27
MHP10L20	10 Pole	Single	93,5	52	82	57	M20	57.27
MHP16L25	16 Pole	Single	117	57	105	63	M25	77.27
MHP24L25	24 Pole	Single	144	57	132	63	M25	104.27



Top Entry Hood, Double Lever



Part No.	# Poles	Levers	A	B	L	L1	M	Size
MHV10.20	10 Pole	Double	73	43	58	45	M20	57.27
MHV16.25	16 Pole	Double	93,5	43	58	45	M25	77.27
MHV24.32	24 Pole	Double	120	43	68	55	M32	104.27



CONNECTORS

Side Entry Hood, Double Lever





Part No.	# Poles	Levers	A	B	L	M	Size
MHO10.20	10 Pole	Double	73	43	52	M20	57.27
MHO16.25	16 Pole	Double	93,5	43	63	M25	77.27
MHO24.32	24 Pole	Double	120	43	63	M32	104.27

Panel Mount Base, Double Lever




Part No.	# Poles	Levers	A	B	C	L	Size
CHI10	10 Pole	Double	95,5	45,5	58	29	57.27
CHI16	16 Pole	Double	115,5	45,5	58	29	77.27
CHI24	24 Pole	Double	142,5	45,5	58	29	104.27

Surface Mount Base, Double Lever





Part No.	# Poles	Levers	A	B	C	L	M	Size
MHP10.20	10 Pole	Double	93,5	52	82	57	M20	57.27
MHP16.25	16 Pole	Double	117	57	105	63	M25	77.27
MHP24.25	24 Pole	Double	144	57	132	63	M25	104.27

Inserts Male

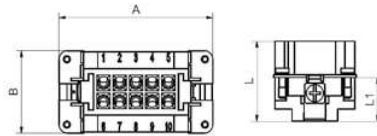


Part No.	# Poles	Pin #	A	B	L	L1	Size
CNEM16T	16 Pole	1-16	83,5	34	33	18	77.62
CNEM16TN	16 Pole	17-32	83,5	34	33	18	
CNEM24T	24 Pole	1-16	110,3	34	33	18	104.62
CNEM24TN	24 Pole	17-32	110,3	34	33	18	

Inserts Female

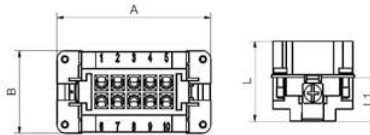


Part No.	# Poles	Pin #	A	B	L	L1	Size
CNEF16T	16 Pole	1-16	83,5	34	33	18	77.62
CNEF16TN	16 Pole	17-32	83,5	34	33	18	
CNEF24T	24 Pole	1-24	110,3	34	33	18	104.62
CNEF24TN	24 Pole	25-48	110,3	34	33	18	

Top Entry Hood

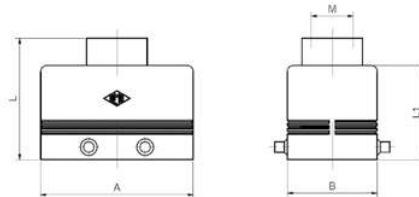

Part No.	# Poles	Levers	A	B	L	L1	M	Size
MHV32.32	32 Pole	Double	93,5	82,5	117	94	M32	77.62
MHV48.L32	48 Pole	Single	121	90	121	98	M40	104.62



Side Entry Hood

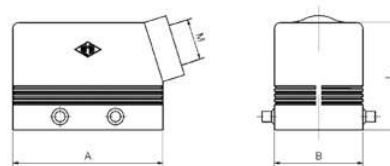

Part No.	# Poles	Levers	A	B	L	M	Size
MHO32.32	32 Pole	Double	93,5	82,5	94	M32	77.62
MHO48.L32	48 Pole	Single	121	90	98	M40	104.62



CONNECTORS

Surface Mount Base, Double Lever





Part No.	# Poles	Levers	A	B	C	L	M	Size
MHP32.40	32 Pole	Double	125	84	112	90	M40	77.62

Surface Mount Base, Single Lever and Cover



Part No.	# Poles	Levers	A	B	C	L	M	Size
MHP48LS40	48 Pole	Single	141	120	111	99	M40	104.62

Panel Mount Base



Part No.	# Poles	Levers	A	B	L	Size
CHI32	32 Pole	Double	126	92	35	77.62
CHI48L	48 Pole	Single	167,5	93	42	104.62

Cable Glands



Part No.	Thread
AGM20T	M20
AGM25T	M25
AGM32T	M32